

F5045P

FUJI High-side IPS

High-side Intelligent Power Switch


Features

- Low minimum operating voltage(min.3V)
- Low stand by current
- Two input terminals (for on state hold)
- Over current detection
- Over temperature shutdown
- High speed switching

Applications

- Main relay driver

Outline drawings [mm]

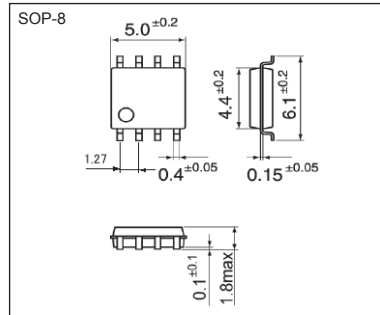

Connection

TERMINAL No.	FUNCTION	SYMBOL
①	OUTPUT	OUT
②	GROUND	GND
③	STATUS	ST
④	INPUT	IN
⑤ ⑥ ⑦ ⑧	SUPPLY VOLTAGE	V _{cc}

Maximum ratings and characteristics

Absolute maximum ratings (at T_c=25°C)

Description	Symbol	Characteristics	Unit	Remarks
Supply voltage	V _{cc}	50	V	Pulse 0.25 sec
		33	V	DC
Continuous drain current	I _D	1.0	A	*
Input voltage	V _{IN}	-0.3~V _{cc} +0.3	V	DC
Maximum power dissipation	P _D	1.5	W	*
Operating junction temperature	T _j	150	°C	-
Storage temperature range	T _{stg}	-55~150	°C	-
Single pulse inductive load switch-off energy dissipation	E _{CL}	25	mJ	T _j =150°C, L=50mH, Single pulse, dv/dt≤10V/us


* Surface mounted on 1000mm² PCB(FR-4)

Electrical characteristics (at T_c=25°C, unless otherwise specified.)

Description	Symbol	Conditions	min.	typ.	max.	Unit
Operating voltage	V _{cc} **	R _L =26Ω	2.87	-	33	V
Standby current	I _{cc}	V _{cc} =13V, R _L =26Ω, V _{IN1} =V _{IN2} =0V	-	-	130	μA
Input voltage	V _{IN} (H)	V _{cc} =3~5V	0.7xV _{cc}	-	-	V
	V _{IN} (L)	V _{cc} =3~5V	-	-	0.3xV _{cc}	V
	V _{IN} (H)	V _{cc} >5V	3.5	-	-	V
	V _{IN} (L)	V _{cc} >5V	-	-	1.5	V
Input current 1	I _{IN} (H)1	V _{cc} =13V, V _{IN1} =5V	-	-	100	μA
Input current 2	I _{IN} (H)2	V _{cc} =13V, V _{IN2} =5V	-	-	100	μA
On-state resistance	R _{DS(on)}	V _{cc} =13V, I _L =0.5A	-	-	0.6	Ω
Output leakage current	I _{OL}	V _{cc} =13V	-	-	80	μA
Over current detection	I _{OC}	V _{cc} =13V	2	-	-	A
Over-temperature shutdown	T _{trip}	V _{cc} =13V	150	-	-	°C
Turn-on time	T _{on}	V _{cc} =13V, R _L =26Ω	-	-	120	μs
Turn-off time	T _{off}	V _{cc} =13V, R _L =26Ω	-	-	40	μs
Output-clamp voltage	V _{clamp} ***	V _{cc} =13V, I _L =0.5A, V _{IN1} =V _{IN2} =0V, L=10mH	-(50-V _{cc})	-	-(60-V _{cc})	V
Diode forward on-voltage	V _{SD}	V _{IN1} =V _{IN2} =0V, I _{SD} =-1A	-	-	1.5	V

** Minimum of operating voltage is defined as the voltage of R_{DS(on)} = 2.45Ω

*** <Output-clamp voltage: V_{clamp}> 50V≤V_{CC}+V_{clamp}≤60V (T_c=25°C) ←




● Electrical characteristics (at Tc=-40~105°C, unless otherwise specified.)

Description	Symbol	Conditions	min.	typ.	max.	Unit
Operating voltage	V _{cc} **	R _L =26Ω	3	-	33	V
Standby current	I _{cc}	V _{cc} =13V, R _L =26Ω, V _{IN1} =V _{IN2} =0V	-	-	150	μA
Input voltage	V _{IN} (H)	V _{cc} =3~5V	0.7xV _{cc}	-	-	V
	V _{IN} (L)	V _{cc} =3~5V	-	-	0.3xV _{cc}	V
	V _{IN} (H)	V _{cc} >5V	3.5	-	-	V
	V _{IN} (L)	V _{cc} >5V	-	-	1.5	V
Input current 1	I _{IN} (H)1	V _{cc} =13V, V _{IN1} =5V	-	-	110	μA
Input current 2	I _{IN} (H)2	V _{cc} =13V, V _{IN1} =5V	-	-	110	μA
On-state resistance	R _{DS(on)}	V _{cc} =13V, I _L =0.5A	-	-	1.0	Ω
Output leakage current	I _{OL}	V _{cc} =13V	-	-	92	μA
Over current detection	I _{OC}	V _{cc} =13V	1.3	-	-	A
Turn-on time	T _{on}	V _{cc} =13V, R _L =26Ω	-	-	140	μs
Turn-off time	T _{off}	V _{cc} =13V, R _L =26Ω	-	-	45	μs
Output-clamp voltage	V _{clamp} ***	V _{cc} =13V, I _L =0.5A, V _{IN1} =V _{IN2} =0V, L=10mH	-(48.4-V _{cc})	-	-(61.8-V _{cc})	V
Diode forward on-voltage	V _{SD}	V _{IN1} =V _{IN2} =0V, I _{SD} =-1A	-	-	1.8	V

** Minimum of operating voltage is defined as the voltage of R_{DS(on)} = 2.45Ω

*** <Output-clamp voltage: V_{clamp}> 50V≤V_{CC}+V_{clamp}≤60V (Tc=25°C)



● Thermal characteristics


Description	Symbol	Test conditions	min.	typ.	max.	Unit
Thermal resistance	R _{th(j-a)}	Junction - ambient****	-	-	83.0	°C/W

**** Surface mounted on 1000mm² PCB (FR-4)


● Truth table

	Input1 voltage	Input2 voltage	Output voltage	Remarks
Normal operation	L	L	L	-
	L	H	H	
	H	L	H	
	H	H	H	
Over-current	L	L	L	Auto-restart *Current-limiting mode
	L	H	*	
	H	H	*	
Over-temperature	L	L	L	Auto-restart
	L	H	L	
	H	H	L	
Over of input terminals	Open	Open	L	"Open" means "L" level, because of pull-down circuit.
	Open	L	L	
	L	Open	L	
	Open	H	H	
	H	Open	H	


■ Timing chart

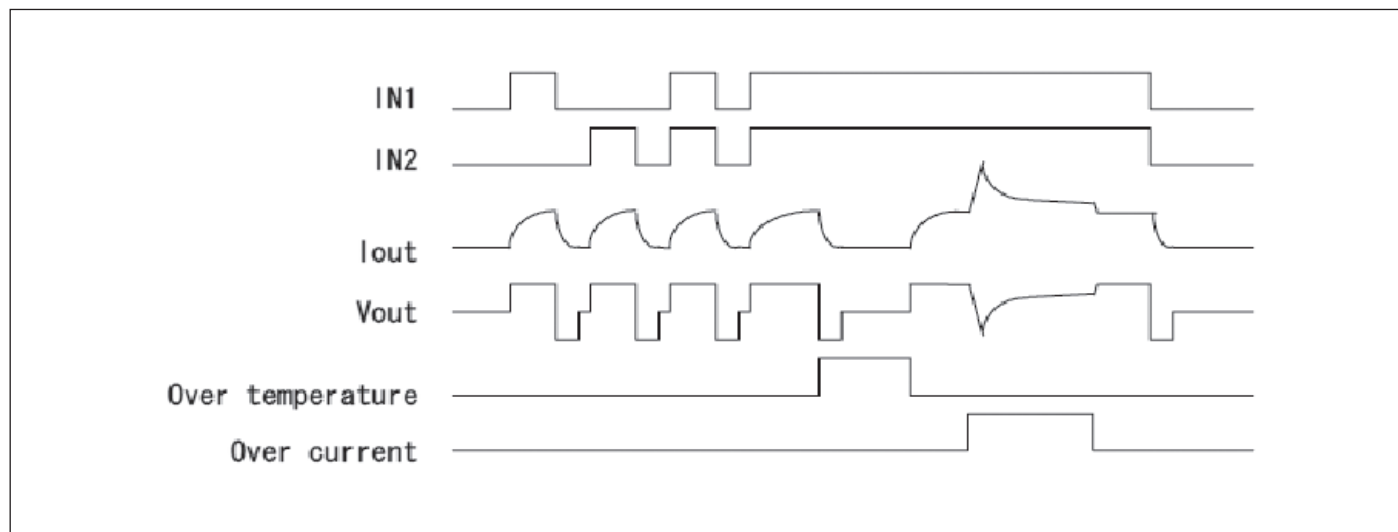


■ Circuit block diagram

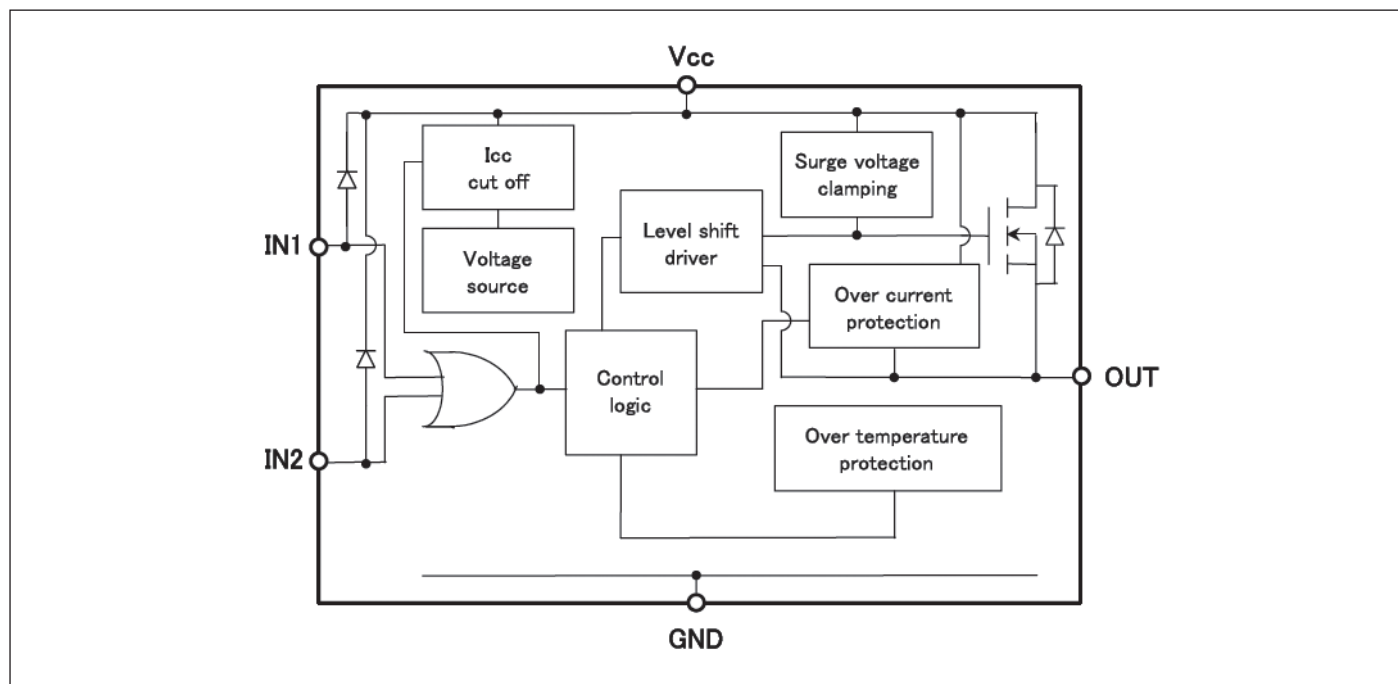


Minimum operation voltage
 $V_{cc(min.)} = f(T_j) : R_L = 26 \Omega$

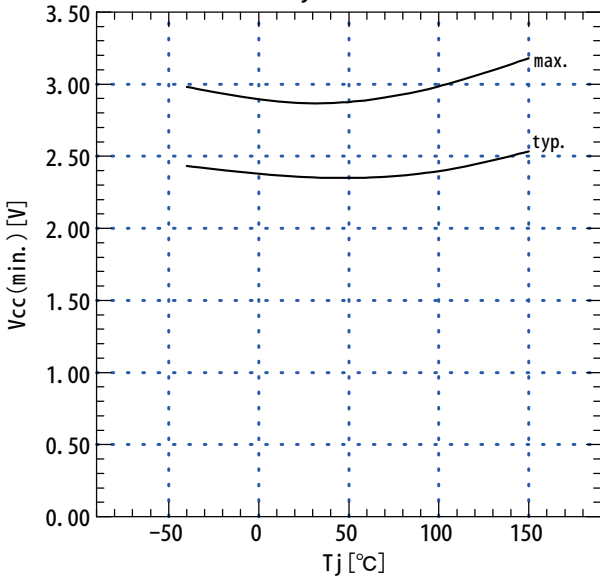


Standby current
 $I_{cc} = f(T_j) : V_{cc} = 13V$

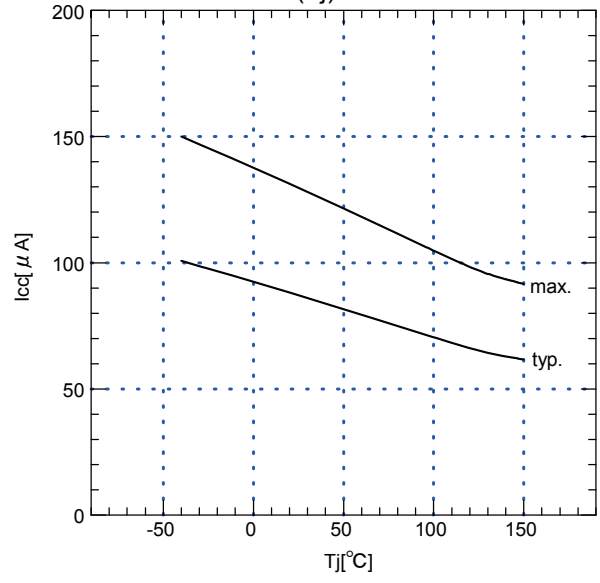


Input threshold voltage
 $V_{IN(th)} = f(T_j) : V_{cc} = 13V$

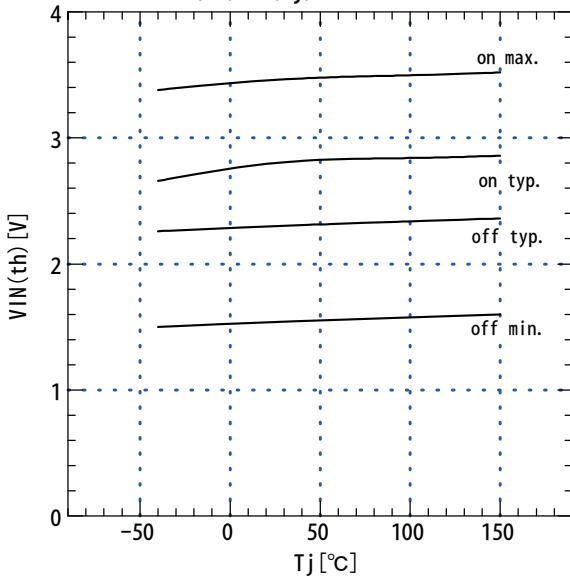


Input threshold voltage
 $V_{IN(th)} = f(V_{cc})$

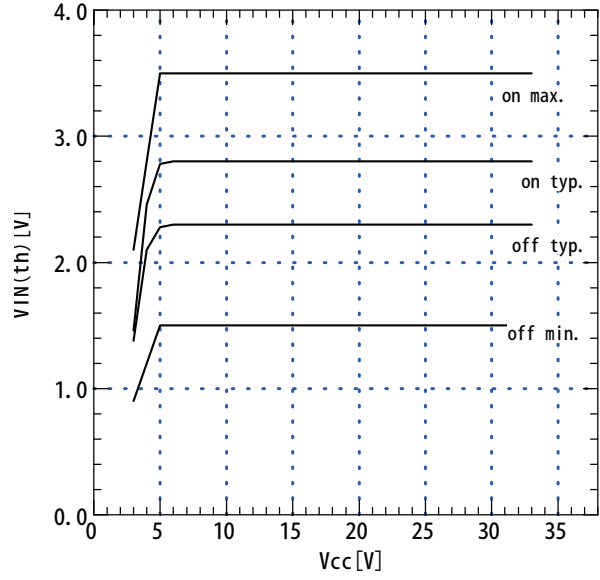


On-state resistance
 $R_{DS(ON)} = f(T_j) : V_{cc} = 13V, I_L = 0.5A$

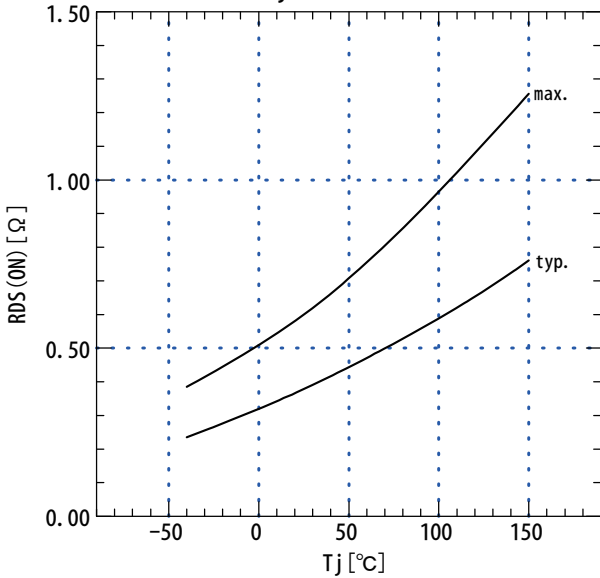


On-state resistance
 $R_{DS(ON)} = f(V_{cc}) : I_L = 0.5A$

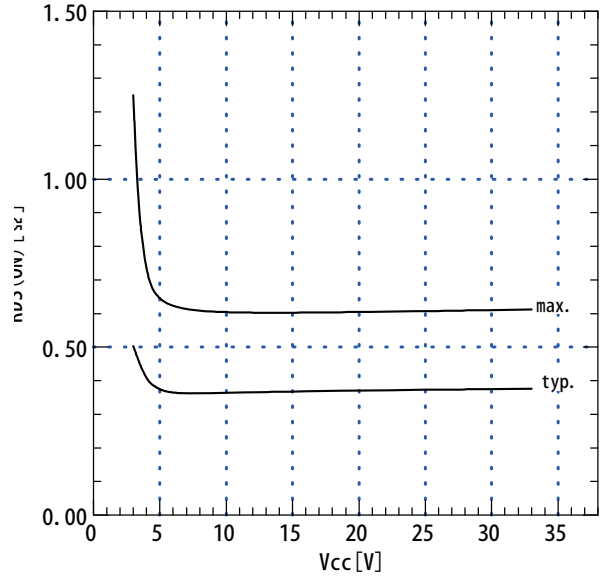


Input current1,2
 $I_{IN(H)1}, I_{IN(H)2} = f(T_j) : V_{CC} = 13V, V_{IN1} \text{ or } V_{IN2} = 5V$

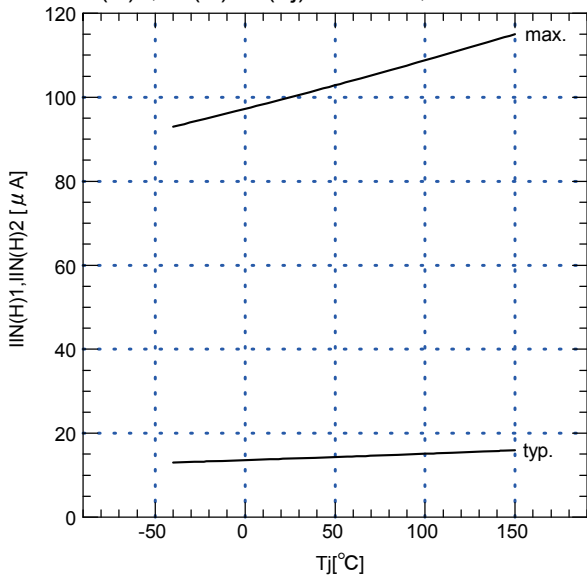


Output leakage current
 $I_{OL} = f(T_j) : V_{CC} = 13V$

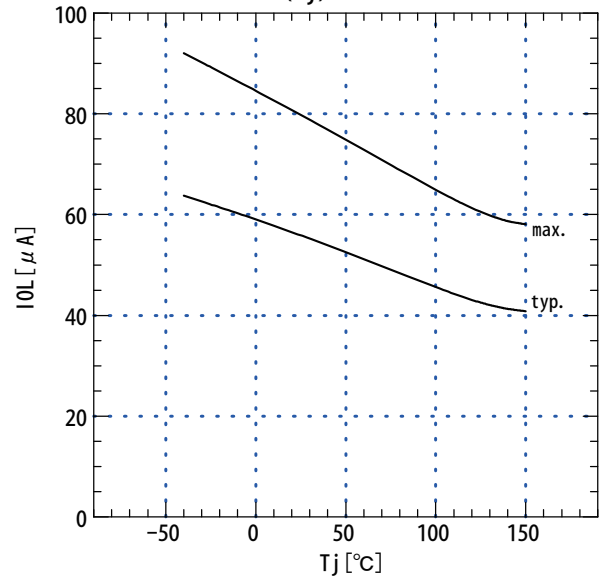


Over-current detection
 $I_{OC} = f(T_j) : V_{CC} = 13V$

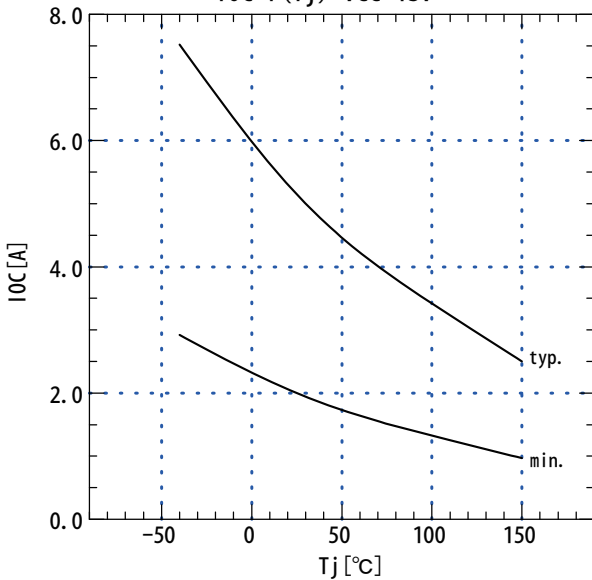


Over-current detection
 $I_{OC} = f(V_{CC})$

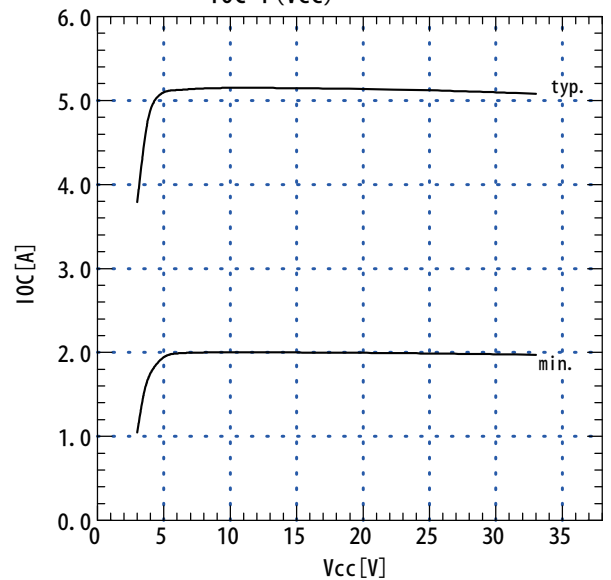

Turn-on time, Turn-off time
 $t_{on}, t_{off} = f(T_j) : V_{CC} = 13V, R_l = 26\Omega$

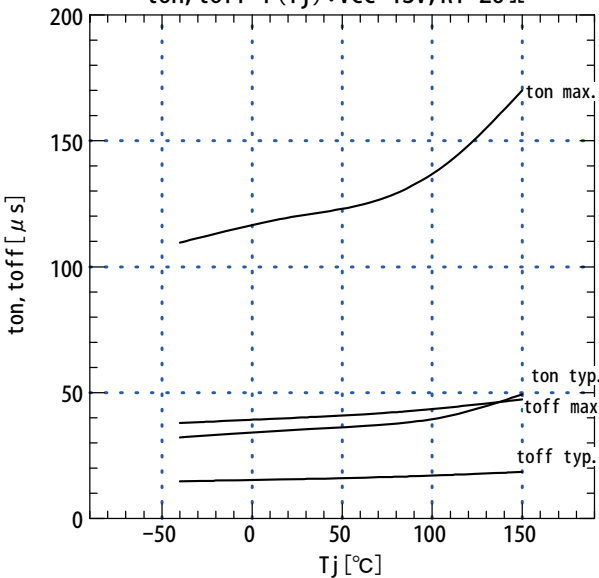

Vclamp detection
 $V_{clamp} = f(T_j) : V_{CC} = 13V, L = 10mH$

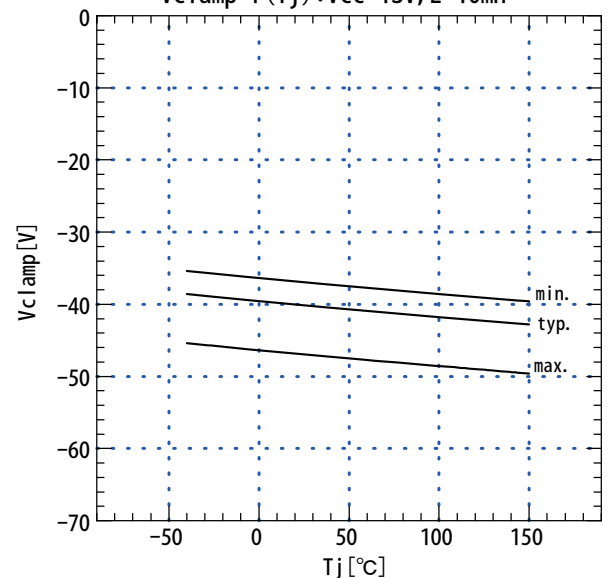

WARNING

1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of March 2010. The contents are subject to change without notice for specification changes or other reasons. When using a product listed in this Catalog, be sure to obtain the latest specifications.
2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. No right or license, either express or implied, under any patent, copyright, trade secret or other intellectual property right owned by Fuji Electric Systems Co., Ltd. is (or shall be deemed) granted. Fuji Electric Systems Co., Ltd. makes no representation or warranty, whether express or implied, relating to the infringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
3. Although Fuji Electric Systems Co., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design fail-safe, flame retardant, and free of malfunction.
4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 - Computers
 - OA equipment
 - Communications equipment (terminal devices)
 - Measurement equipment
 - Machine tools
 - Audiovisual equipment
 - Electrical home appliances
 - Personal equipment
 - Industrial robots etc.
5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Systems Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
 - Transportation equipment (mounted on cars and ships)
 - Trunk communications equipment
 - Traffic-signal control equipment
 - Gas leakage detectors with an auto-shut-off feature
 - Emergency equipment for responding to disasters and anti-burglary devices
 - Safety devices
 - Medical equipment
6. Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
 - Space equipment
 - Aeronautic equipment
 - Nuclear control equipment
 - Submarine repeater equipment
7. Copyright ©1996-2008 by Fuji Electric Systems Co., Ltd. All rights reserved.
No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Systems Co., Ltd.
8. If you have any question about any portion in this Catalog, ask Fuji Electric Systems Co., Ltd. or its sales agents before using the product.
Neither Fuji Electric Systems Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.