

2MBI200SB-120

IGBT Modules


IGBT MODULE (S series) 1200V / 200A / 2 in one package

Features

High speed switching Voltage drive Low Inductance module structure

■ Applications

Inverter for Motor Drive
AC and DC Servo Drive Amplifier
Uninterruptible Power Supply
Industrial machines, such as Welding machines



■ Maximum Ratings and Characteristics

Absolute Maximum Ratings (at Tc=25°C unless otherwise specified)

Items	Symbols	Symbols Conditions		Maximum ratings Units		
Collector-Emitter voltage	Vces			1200	V	
Gate-Emitter voltage	VGES			±20	V	
Collector current	lo.	Continuous	Tc=25°C	300		
	IC .	Continuous	Tc=80°C	200		
	la mulas	Ama a	Tc=25°C	600		
	lc pulse	1ms	Tc=80°C	400	Α	
	-lc					
	-lc pulse	1ms		400		
Collector power dissipation	Pc	1 device	12/19/2019	1500000	W	
Junction temperature	Tj				°C	
Storage temperature	Tstg	П	RESTO J	€ 70 to +125	°C	
Isolation voltage (*1)	Viso 12	AC [] tenin.	Waste C	2500	V	
Screw torque	Mounting (*25)		10 PM	3.5	N·m	
	Terminals (2)		, JITA	4.5	14.111	

Note *1: All terminals should be connected together when isolation test will be done.

Note *2: Recommendable value : Mounting : 2.5-3.5 N/m (M5 or M6). Terminals : 3.5-4.5 N/m (M6)

• Electrical characteristics (at Tj 25°C unless otherwise specified)


Items	(/ /)	alle	Conditions		Characteristics			Units
	\mathbb{D}	Symbols			min.	typ.	max.	UIIIIS
Zero gate voltage collector current 🛛 🎠 🕺	ŢO T	lces	Vae = 0V, Vae = 1200V		-	-	1.0	mΑ
Gate-Emitter leakage current 🚫 🔘 🧡		lges	$V_{CE} = 0V$, $V_{GE} = \pm 20V$		_	-	0.4	μA
Gate-Emitter threshold voltage		VGE (In)	Vce = 20V, Ic = 200mA		5.5	7.2	8.5	V
Collector-Emitter saturation voltage		V	V _{9E} = 15V I _c = 200A	Tj=25°C	_	2.3	2.6	V
		Vce (298)		Tj=125°C	-	2.8		
Input capacitance		Cies	V ₂₅ = 0V		-	24000		
Output capacitance		Coes	V _{CE} = 10V		-	5000	-	рF
Reverse transfer capacitance		Cres	f = 1MHz		-	4400	-	
Turn-on time		ton			-	0.35	1.2	
		tr	Vcc = 600V		_	0.25	0.6	
		$\frac{\text{Ic} = 200A}{\text{V}_{26} = \pm 15V}$		-	0.1		μs	
Turn-off time		toff	$R_0 = 4.7\Omega$		-	0.45	1.0	
		tf			_	0.08	0.3	
Forward on voltage		Vr	I- = 200A	Tj=25°C		2.3	3.0	V
			= - ZUUA 	Tj=125°C	-	2.0	~	
Reverse recovery time		trr	I= = 200A	·	_	_	0.35	μs


Thermal resistance characteristics


Items	Symbols	Conditions	Cha min.	aracteris typ.	tics max.	Units
Thermal registance (Adeulas)	Rth(j-c)	IGBT	-	-	0.085	
mermanesistance (mevice)		FWD	-	-	0.18	°C/W
Contact thermal resistance	Rth(c-f)	with Thermal Compound (*3)	-	0.025	-	


Note †3: This is the value which is defined mounting on the additional cooling fin with thermal compound.


■ Characteristics (Representative)

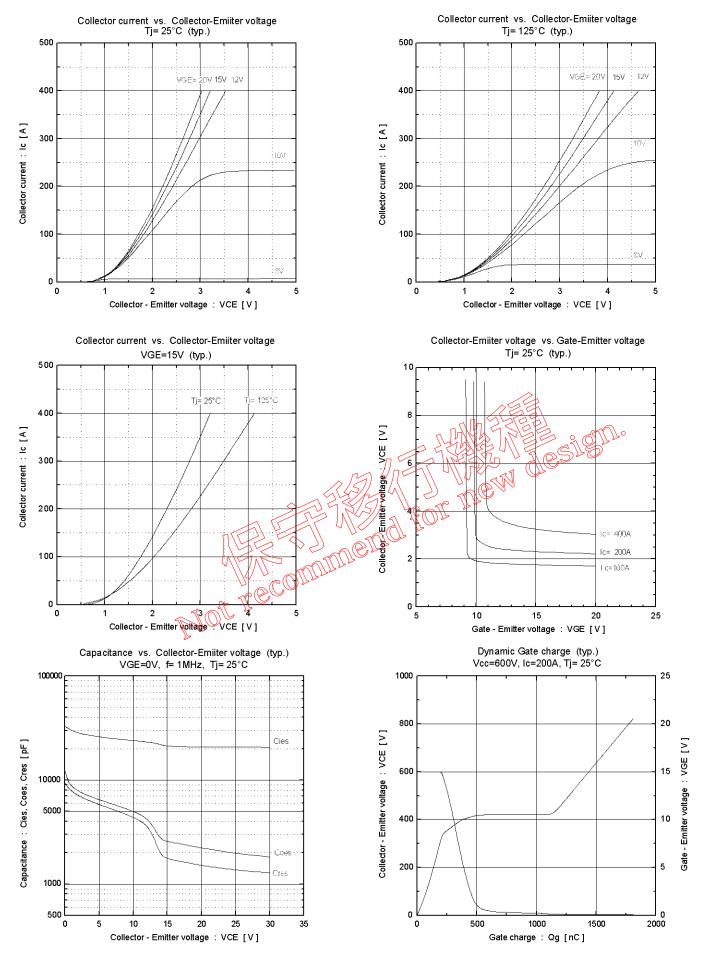

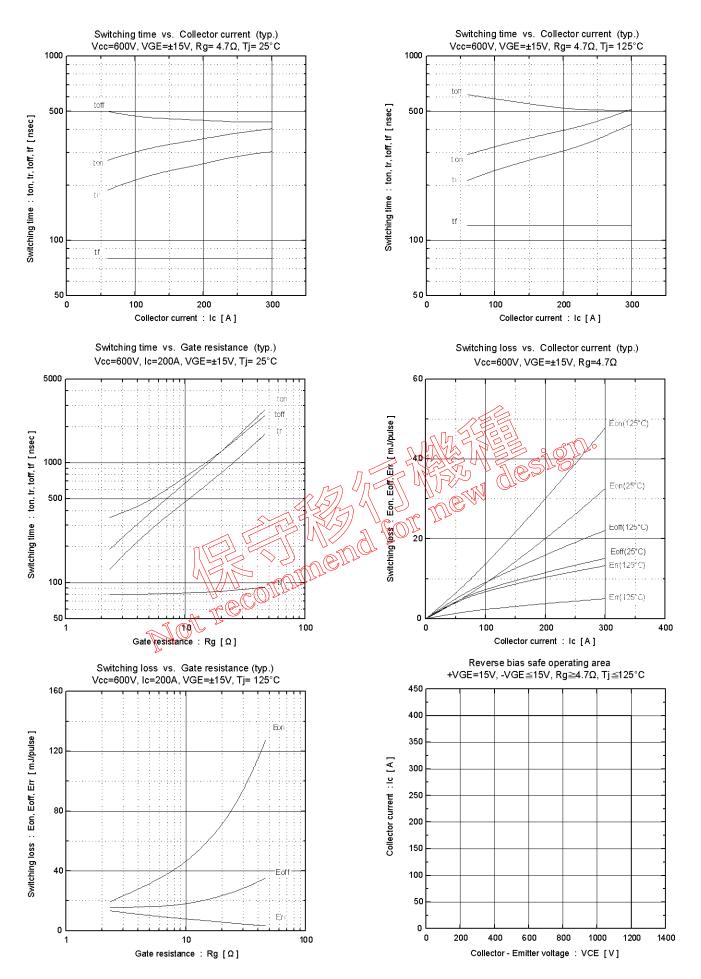


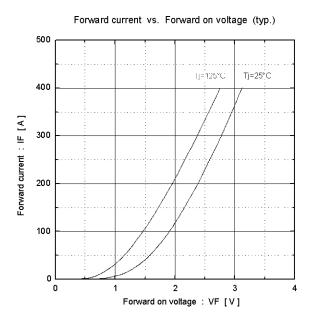

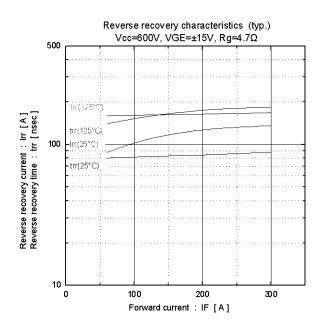


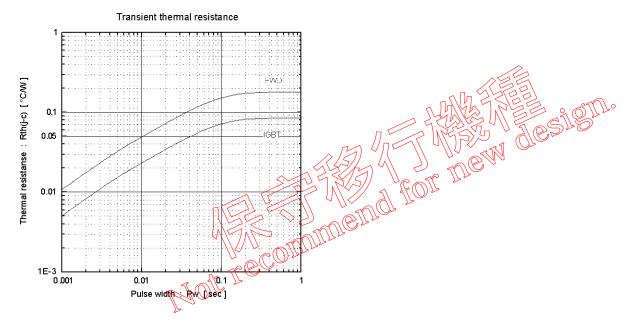

Outline Drawings, mm

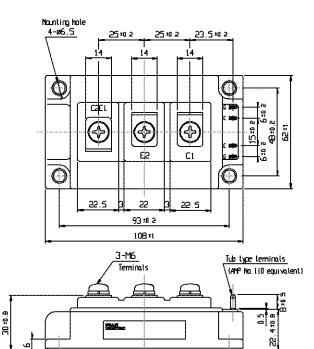



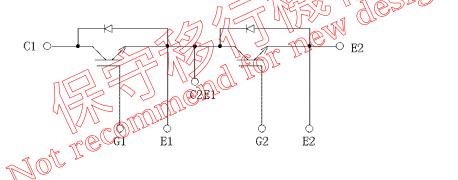

WARNING

- 1. This Catalog contains the product specifications, characteristics, data, materials, and structures as of October 2008.

 The contents are subject to change without notice for specification changes or other reasons. When using a product listed in his Catalog, be sure to obtain the latest specifications.
- 2. All applications described in this Catalog exemplify the use of Fuji's products for your reference only. Nextight of icense, either express or implied, under any patent, copyright, trade secret or other intellectual property right owiced by Fuji Electric Device Technology Co., Ltd. is (or shall be deemed) granted. Fuji Electric Device Jechnology Co., Ltd. makes no representation or warranty, whether express or implied, relating to the intringement or alleged infringement of other's intellectual property rights which may arise from the use of the applications described herein.
- 3. Although Fuji Electric Device Technology En., Ltd. is enhancing product quality and reliability, a small percentage of semiconductor products may become faulty. When using Fuji Electric semiconductor products in your equipment, you are requested to take adequate safety measures to prevent the equipment from causing a physical injury, fire, or other problem if any of the products become faulty. It is recommended to make your design tail-safe, flame retardant, and free of malfunction.
- 4. The products introduced in this Catalog are intended for use in the following electronic and electrical equipment which has normal reliability requirements.
 - Computers
- OA equipment
- Communications equipment (terminal devices)
- Measurement equipment

- Machine tools
- Audiovisual equipment
- Electrical home appliances
- Personal equipment
- Industrial robots etc.
- 5. If you need to use a product in this Catalog for equipment requiring higher reliability than normal, such as for the equipment listed below, it is imperative to contact Fuji Electric Device Technology Co., Ltd. to obtain prior approval. When using these products for such equipment, take adequate measures such as a backup system to prevent the equipment from malfunctioning even if a Fuji's product incorporated in the equipment becomes faulty.
 - Transportation equipment (mounted on cars and ships)
- Trunk communications equipment

• Traffic-signal control equipment

- Gas leakage detectors with an auto-shut-off feature
- Emergency equipment for responding to disasters and anti-burglary devices
- Safety devices

- Medical equipment
- Do not use products in this Catalog for the equipment requiring strict reliability such as the following and equivalents to strategic equipment (without limitation).
 - Space equipment
- Aeronautic equipment
- Nuclear control equipment

- Submarine repeater equipment
- 7. Copyright ©1996-2008 by Fuji Electric Device Technology Co., Ltd. All rights reserved.

 No part of this Catalog may be reproduced in any form or by any means without the express permission of Fuji Electric Device Technology Co., Ltd.
- 8. If you have any question about any portion in this Catalog, ask Fuji Electric Device Technology Co., Ltd. or its sales agents before using the product.
 - Neither Fuji Electric Device Technology Co., Ltd. nor its agents shall be liable for any injury caused by any use of the products not in accordance with instructions set forth herein.