

SPECIFICATION

Device Name : IGBT module

Type Name : 2MBI400NT-060-02

Spec. No. : **MS5F3984**

This manual and the information herein is the property of Fuji Electric Co. Ltd. They shall not be reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party without the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.
Matsumoto Factory

	DATE	NAME	APPROVED	Fuji Electric Co., Ltd.	
DRAWN	Apr. - 2 - '97	<i>T. Kobayashi</i>		DWG NO.	MS5F3984
CHECKED	Apr. - 2 - '97	<i>S. Ogawa</i>			
			S.K.		1/8

Revised Records

Date	Classi- fication	Ind.	Content	Applied date	Drawn	Checked	Approved
	enactment	—	—————	Issued date	—	S. Ogawa	S. K.

This manual and the information herein is the property of
 Fuji Electric Co., Ltd. They shall be neither reproduced, copied,
 lent, or disclosed in any way whatsoever for the use of any
 third party, nor used for the manufacturing purposes without
 the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.

DWG. NO.

MS5 F 3984


$\frac{2}{8}$

Ratings and characteristics of Fuji IGBT Module


2MBI400NT-060-02

1. Outline Drawing

Unit : mm

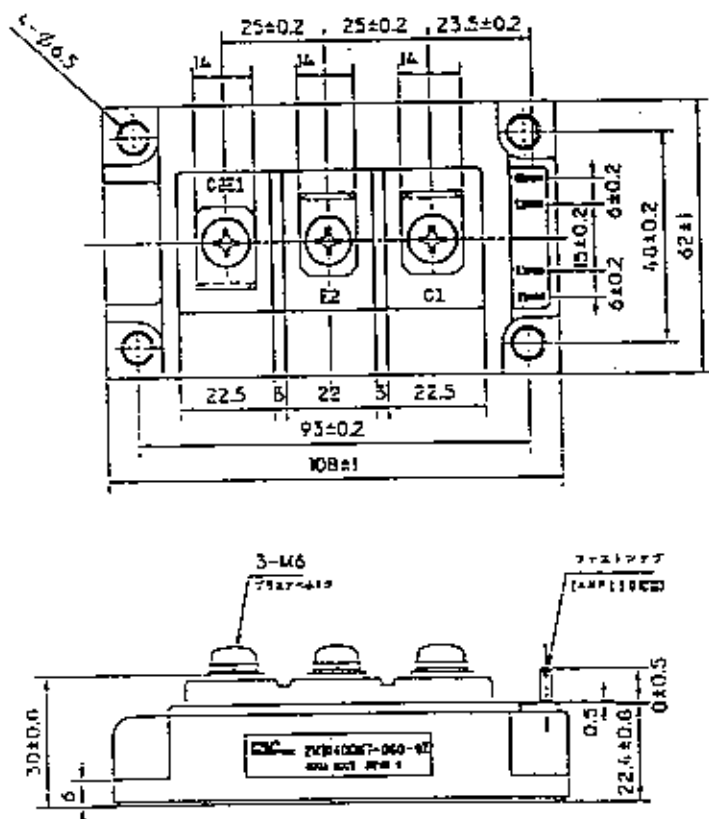

2. Equivalent circuit

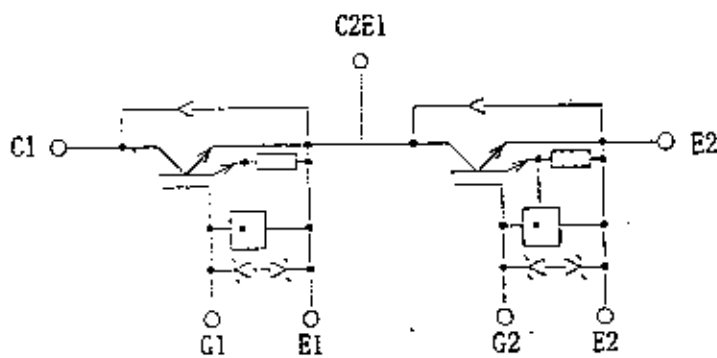

* MLU (Over Current Limiting Circuit)

This manual and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, sent, or disclosed in any way whatsoever for the use of any third party or used for the promotional purposes without the express written consent of Fuji Electric Co., Ltd.

Fuji Electric Co., Ltd.

DWG NO.

MS5F3984

3/8

H04-004-03

3. Absolute Maximum Ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)

Items		Symbols	Ratings	Units
Collector-Emitter voltage		V_{CES}	600	V
Gate-Emitter voltage		V_{GES}	± 20	V
Collector current	Continuous	I_c	400	A
	1ms	I_c pulse	800	
		$-I_c$	400	
	1ms	$-I_c$ pulse	800	
Max. power dissipation		PC	1620	W
Operating temperature		T_j	+150	$^\circ\text{C}$
Storage temperature		T_{stg}	-40~+125	$^\circ\text{C}$
Isolation voltage		V_{is}	AC 2500 (1min.)	V
Screw torque		Mounting *1	3.5	N·m
		Terminals *2	4.5	

Note : *1 Recommendable value : 2.5~3.5 N·m (M5) or (M6)

*2 Recommendable value : 3.5~4.5 N·m (M6)

4. Electrical characteristics (at $T_j=25^\circ\text{C}$ unless otherwise specified)

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Zero gate voltage Collector current	I_{CES}			2.0	$V_{GE}=0V, V_{CE}=600V$	mA
Gate-Emitter leakage current	I_{GES}			30	$V_{CE}=0V, V_{GE}=\pm 20V$	μA
Gate-Emitter threshold voltage	$V_{GE(th)}$	4.5		7.5	$V_{CE}=20V, I_c=400\text{mA}$	V
Collector-Emitter saturation voltage	$V_{CE(sat)}$			2.8	$V_{GE}=15V, I_c=400A$	V
Input capacitance	C_{ies}		26400		$V_{GE}=0V$	pF
Output capacitance	C_{oes}		5870		$V_{CE}=10V$	
Reverse transfer capacitance	C_{res}		2670		$f=1\text{MHz}$	
Turn-on time	t_{on}		0.6	1.2	$V_{cc}=300V$	μs
	t_r		0.2	0.6	$I_c=400A$	
Turn-off time	t_{off}		0.6	1.0	$V_{GE}=\pm 15V$	μs
	t_f		0.2	0.35	$R_G=4.7\Omega$	
Diode forward on voltage	V_f			3.0	$I_f=400A, V_{GE}=0V$	V
Reverse recovery time	t_{rr}			300	$I_f=400A$	ns

5. Thermal resistance characteristics

Items	Symbols	Characteristics			Conditions	Units
		min.	typ.	max.		
Thermal resistance	$R_{th(j-c)}$			0.077	IGBT	$^\circ\text{C}/\text{W}$
	$R_{th(j-c)}$			0.20	Diode	
	*		0.025		the base to cooling fin	
	$R_{th(c-f)}$					

* This is the value which is defined mounting on the additional cooling fin with thermal compound.

Fuji Electric Co., Ltd.


DWGNO

MS5F3984

4/8

H04-004-03

6. Indication on module (モジュール表示)

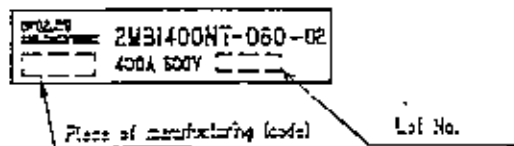

7. Applicable category (適用範囲)

This specification is applied to IGBT module named 2MBI400NT-060-02.
本納入仕様書は、IGBTモジュール 2MBI400NT-060-02 適用する。

8. Storage and transportation notes (保管、運搬上の注意事項)

- The IGBT module should be stored at a standard temperature of 5 to 35°C and humidity of 45 to 75%.
常温保存が望ましい。(5~35°C、45~75%)
- Store modules in a place with few temperature changes in order to avoid condensation on the module surface.
急激な温度変化の無きこと。(モジュール表面が結露しないこと)
- Avoid exposure to corrosive gases and dust.
腐蝕性ガスの発生場所、塵埃の多い場所は避けること。
- Avoid excessive external force on the module.
製品に荷重がかからないように十分注意すること。
- Store modules with unprocessed terminals.
モジュールの端子は未加工の状態で保管すること。
- Do not drop or otherwise shock the modules when transporting.
製品の運搬時に衝撃を与えたり、落下させたりしないこと。


9. Heat sink mounting notes (ヒートシンク取り付け上の注意事項)

- The mounting surface of the heat sink should be finished to a roughness of 10 μ m or less and a warp between screw holes of 100 μ m or less.
本モジュールを取り付ける冷却体の取付面の仕上げは、粗さ10 μ m以下、取付ネジ間で平坦度100 μ m以下とする。
- Each mounting screw should be fastened using a specified torque after pre-fastening using a 1/3 specified torque.
取付けネジは、規定の1/3のトルクで仮締を行った後、規定のトルクで本締を行って下さい。
- If the above notes are not met, it has a possibility to break the insulation between the IGBT module's chips and metal base.
上記注意事項の範囲外で御適用した場合、IGBTモジュールのチップと金属ベース間の絶縁破壊を生ずる可能性があります。


This material and the information herein is the property of Fuji Electric Co., Ltd. They shall not be further reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party without the prior written consent of Fuji Electric Co., Ltd.

This material and the information herein is the property of Fuji Electric Co., Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any third party, nor used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.


Collector current vs. Collector-Emitter voltage
Tj=25°C

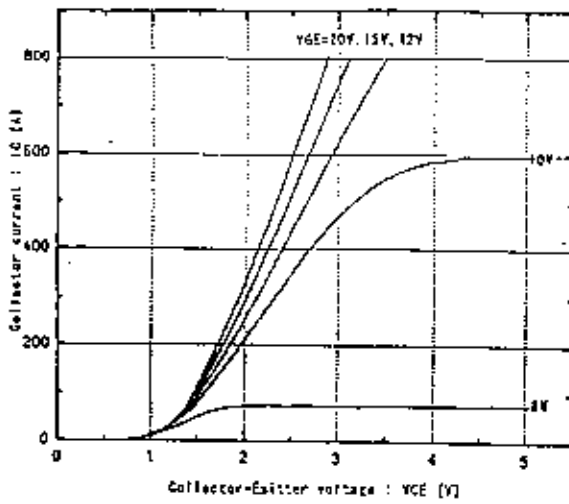


Collector current vs. Collector-Emitter voltage
Tj=125°C

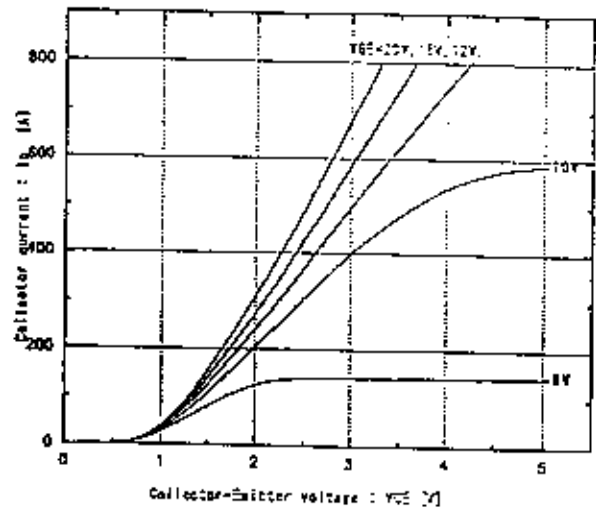


Collector-Emitter vs. Gate-Emitter voltage
Tj=25°C

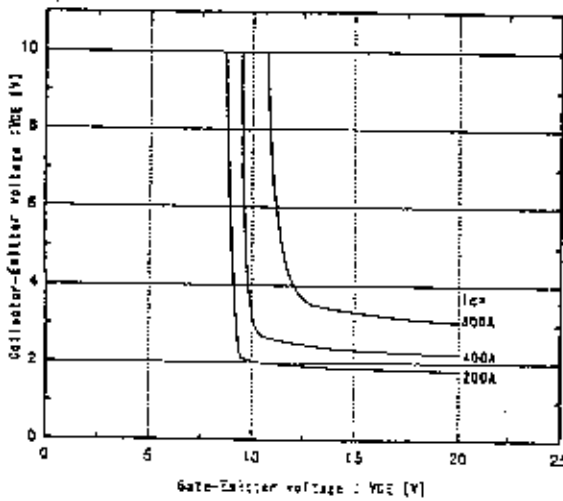


Collector-Emitter vs. Gate-Emitter voltage
Tj=125°C

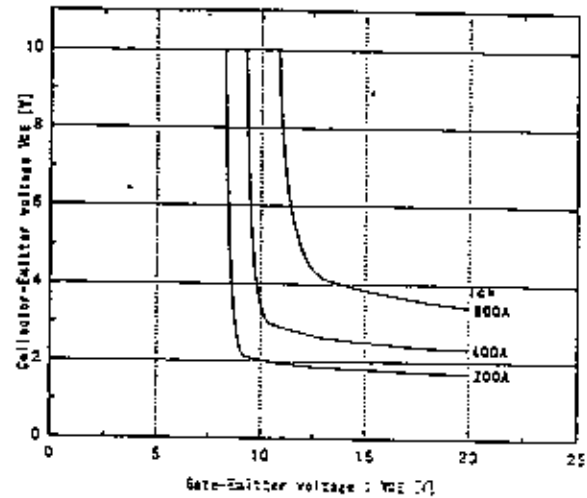

Switching time vs. Collector current
Vce=300V, Rθ=4.1°C/W, VGE=15V, Tj=25°C

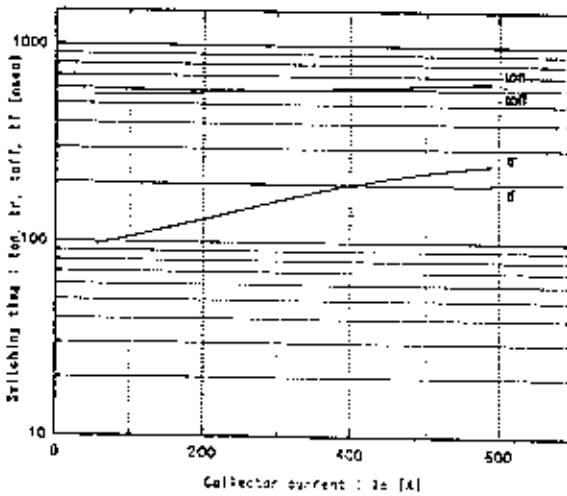

Switching time vs. Collector current
Vce=300V, Rθ=4.1°C/W, VGE=15V, Tj=125°C

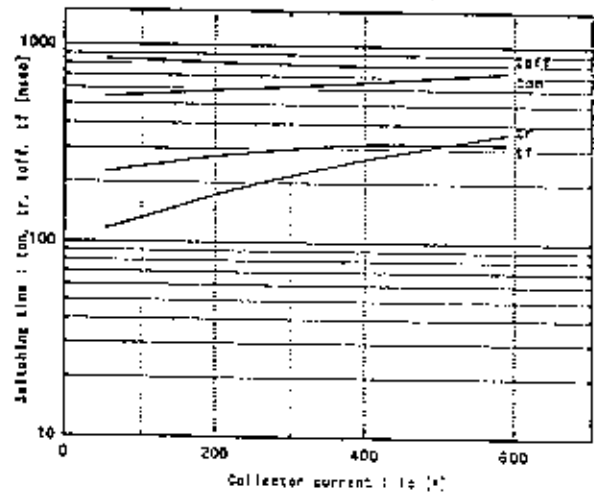

Fuji Electric Co., Ltd.

DWQJ10


MS5F3984

6/8


H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. It may not be further reproduced, copied, lent, or disclosed in any way whatsoever for the use of any individual party without the express written consent of Fuji Electric Co., Ltd.


Switching time vs. R_G
 $V_{CE}=300V$, $I_C=400A$, $V_{GE}=\pm 15V$, $T_J=25^\circ C$

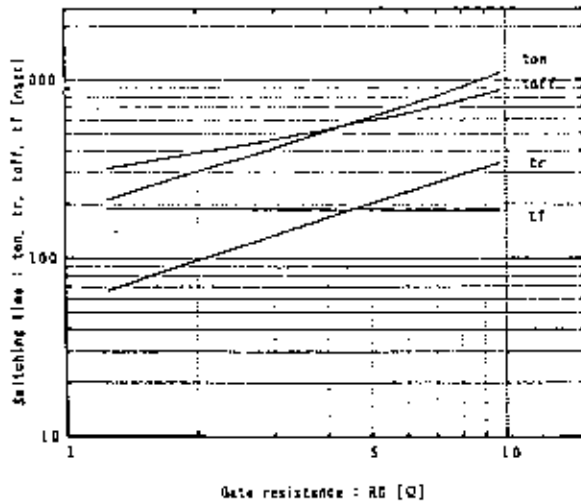


Dynamic input characteristics
 $T_J=25^\circ C$

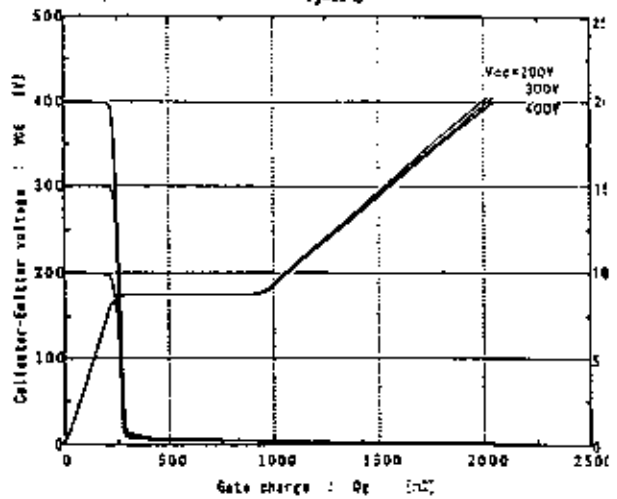


Forward current vs. Forward voltage
 $V_{GE}=0V$

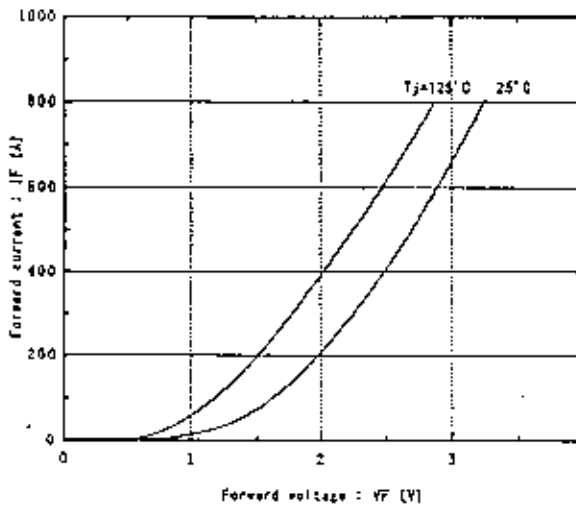


Reverse recovery characteristics
 t_{rr} , I_{rr} vs. I_F

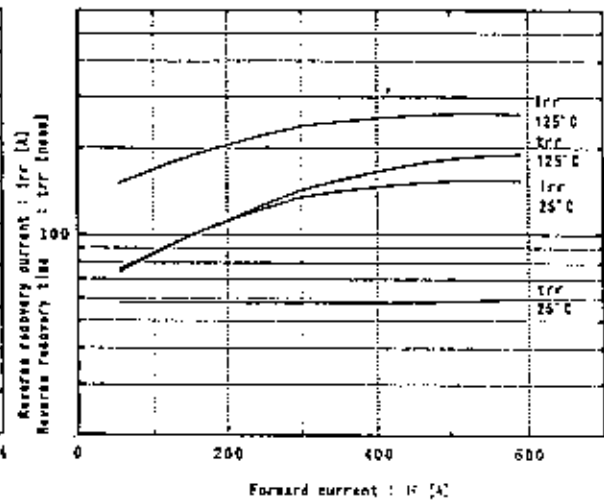

Transient thermal resistance

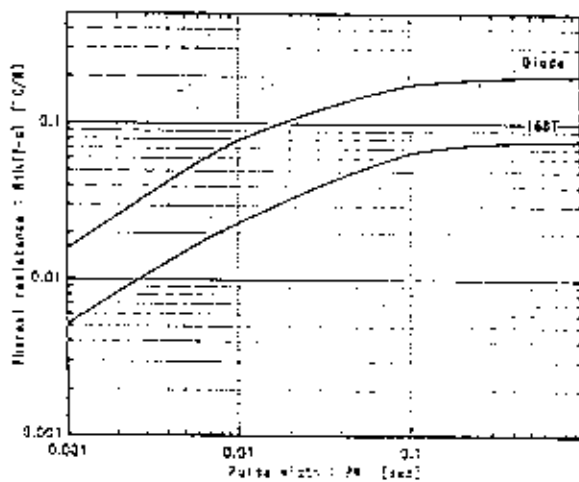

Reversed biased safe operating area
 $+V_{CE} \pm 15V$, $-V_{GE} \pm 15V$, $T_J=125^\circ C$, $R_{th(j-c)}=4.7^\circ C/W$

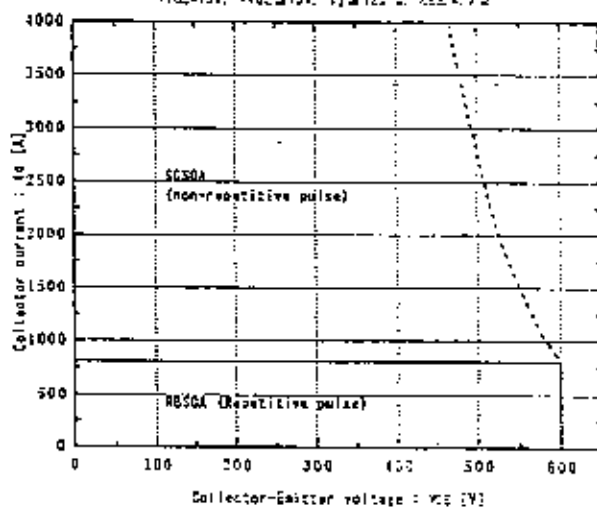

Fuji Electric Co., Ltd.

DWG. NO.


MS5F3984

7/8


H04-004-03

This material and the information herein is the property of Fuji Electric Co. Ltd. They shall be neither reproduced, copied, lent, or disclosed in any way whatsoever for the use of any individual or organization used for the manufacturing purposes without the express written consent of Fuji Electric Co., Ltd.

Switching loss vs. Collector current
 $V_{ce}=100V$, $R_{\theta c}=7.0$, $V_{BE}=1.5V$

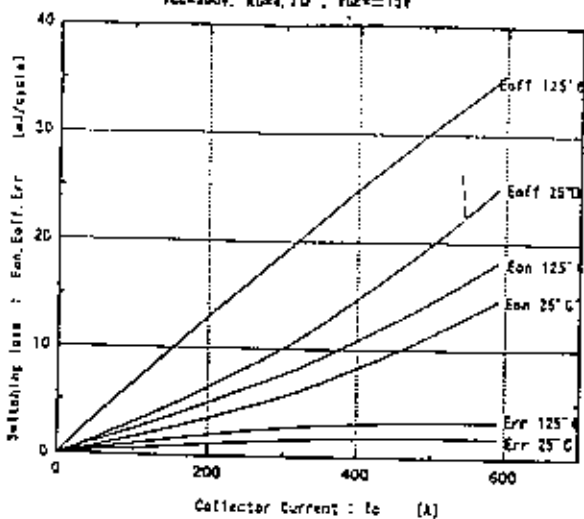

Capacitance vs. Collector-Emitter voltage
 $T_j=25^\circ C$

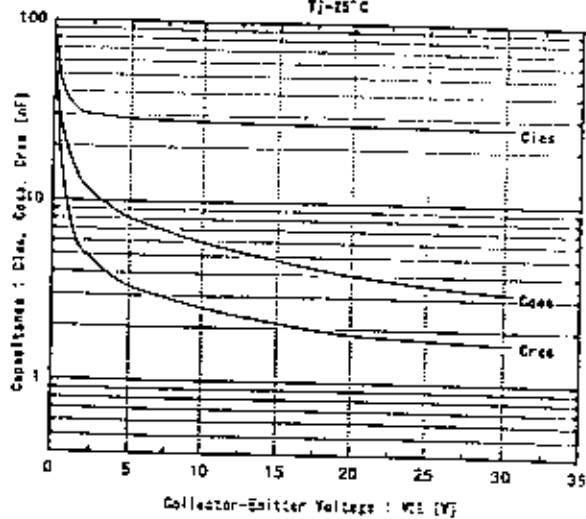

Fuji Electric Co., Ltd.

DWG. NO.

MS 5 F 3984

8/8

H04-004-03