

1200V / 3A


Molded Package

■ Features

- Small molded package
- Low power loss
- Soft switching with low switching surge and noise
- High reliability, high ruggedness (RBSOA, SCSOA etc.)
- Comprehensive line-up

■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply

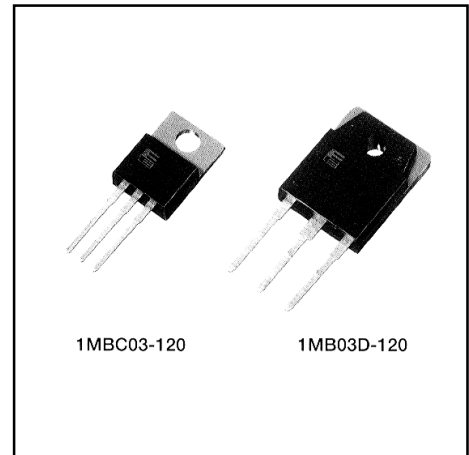

■ Maximum ratings and characteristics

- Absolute maximum ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)



1MBC03-120 / IGBT

Item	Symbol	Rating	Unit		
Collector-Emitter voltage	V_{CES}	1200	V		
Gate-Emitter voltage	V_{GES}	± 20	V		
Collector current	DC	$T_c=25^\circ\text{C}$	I_{C25}	5	A
		$T_c=100^\circ\text{C}$	I_{C100}	2.5	A
	1ms	$T_c=25^\circ\text{C}$	I_{cp}	15	A
Max. power dissipation(IGBT)	P_c	70	W		
Operating temperature	T_j	+150	$^\circ\text{C}$		
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$		
Screw torque	-	40	N·m		

1MB03D-120 / IGBT+FWD

Item	Symbol	Rating	Unit		
Collector-Emitter voltage	V_{CES}	1200	V		
Gate-Emitter voltage	V_{GES}	± 20	V		
Collector current	DC	$T_c=25^\circ\text{C}$	I_{C25}	5	A
		$T_c=100^\circ\text{C}$	I_{C100}	2.5	A
	1ms	$T_c=25^\circ\text{C}$	I_{cp}	15	A
Max. power dissipation (IGBT)	P_c	70	W		
Max. power dissipation (FWD)	P_c	40	W		
Operating temperature	T_j	+150	$^\circ\text{C}$		
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$		
Screw torque	-	40	N·m		

■ Equivalent Circuit Schematic

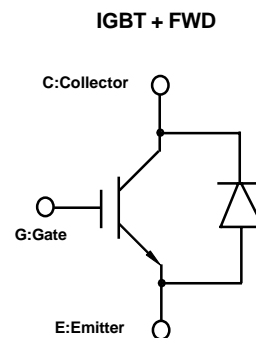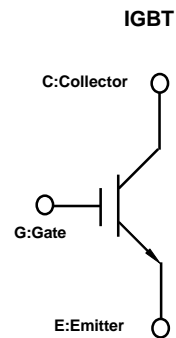

● Electrical characteristics (at Tj=25°C unless otherwise specified)

1MBC03-120 / IGBT

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	ICES	-	-	1.0	VGE=0V, VCE=1200V	mA
Gate-Emitter leakage current	IGES	-	-	20	VCE=0V, VGE=±20V	µA
Gate-Emitter threshold voltage	VGE(th)	5.5	-	8.5	VCE=20V, Ic=2.5mA	V
Collector-Emitter saturation voltage	VCE(sat)	-	-	3.5	VGE=15V, Ic=2.5A	V
Input capacitance	Cies	-	400	-	VGE=0V	pF
Output capacitance	Coes	-	70	-	VCE=10V	
Reverse transfer capacitance	Cres	-	20	-	f=1MHz	
Turn-on time	ton	-	-	1.2	VCC=600V Ic=2.5A	µs
	tr	-	-	0.6	VGE=±15V	
Turn-off time	toff	-	-	1.5	RG=430 ohm	µs
	tf	-	-	0.5	(Half Bridge)	

1MB03D-120 / IGBT+FWD

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	ICES	-	-	1.0	VGE=0V, VCE=1200V	mA
Gate-Emitter leakage current	IGES	-	-	20	VCE=0V, VGE=±20V	µA
Gate-Emitter threshold voltage	VGE(th)	5.5	-	8.5	VCE=20V, Ic=2.5mA	V
Collector-Emitter saturation voltage	VCE(sat)	-	-	3.5	VGE=15V, Ic=2.5A	V
Input capacitance	Cies	-	400	-	VGE=0V	pF
Output capacitance	Coes	-	70	-	VCE=10V	
Reverse transfer capacitance	Cres	-	20	-	f=1MHz	
Turn-on time	ton	-	-	1.2	VCC=600V, Ic=2.5A	µs
	tr	-	-	0.6	VGE=±15V	
Turn-off time	toff	-	-	1.5	RG=430 ohm	µs
	tf	-	-	0.5	(Half Bridge)	
FWD forward on voltage	VF	-	-	3.0	IF=2.5A, VGE=0V	V
Reverse recovery time	trr	-	-	0.35	IF=2.5A, VGE=-10V, di/dt=100A/µs	µs

● Thermal resistance characteristics

1MBC03-120 / IGBT

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	Rth(j-c)	-	-	1.78	IGBT	°C/W


1MB03D-120 / IGBT+FWD

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	Rth(j-c)	-	-	1.78	IGBT	°C/W
	Rth(j-c)	-	-	3.12	FWD	°C/W

■ Outline drawings, mm


1MBC03-120

TO-220AB

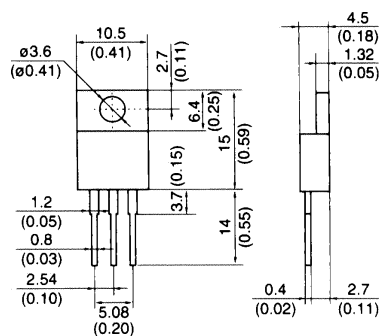

1MB03D-120


TO-3P

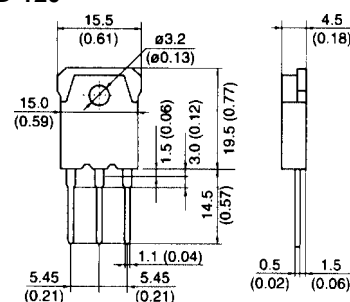


Characteristics

1MBC03-120,1MB03D-120


Collector current vs. Collector-Emmitter voltage
T_j=25°C

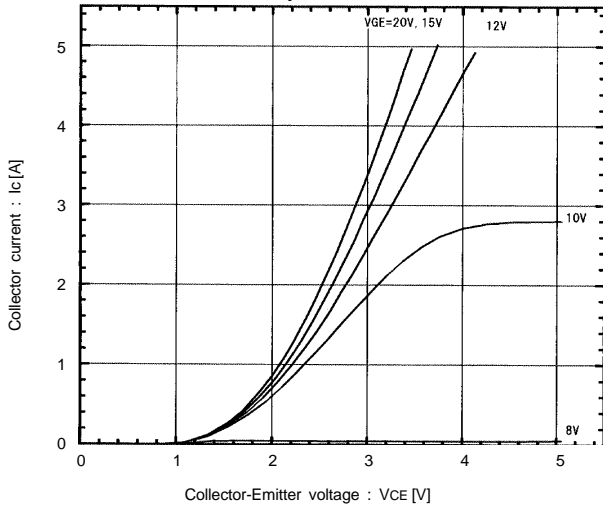


Collector current vs. Collector-Emmitter voltage
T_j=125°C

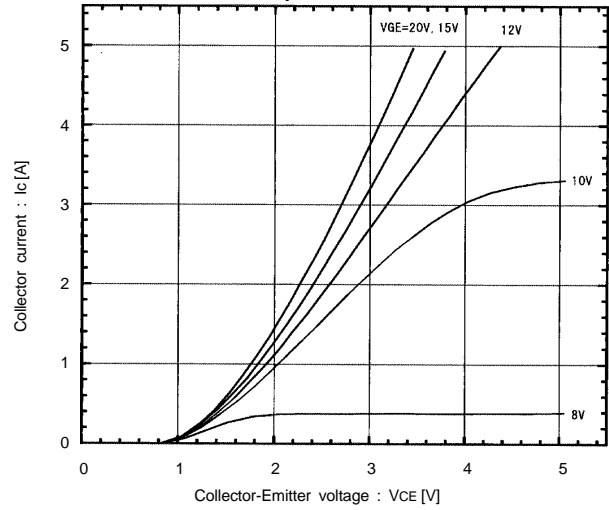


Collector-Emmitter vs. Gate-Emmitter voltage
T_j=25°C

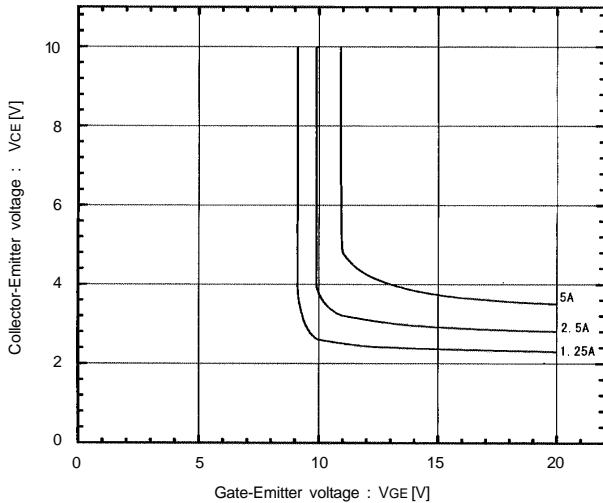


Collector-Emmitter vs. Gate-Emmitter voltage
T_j=125°C

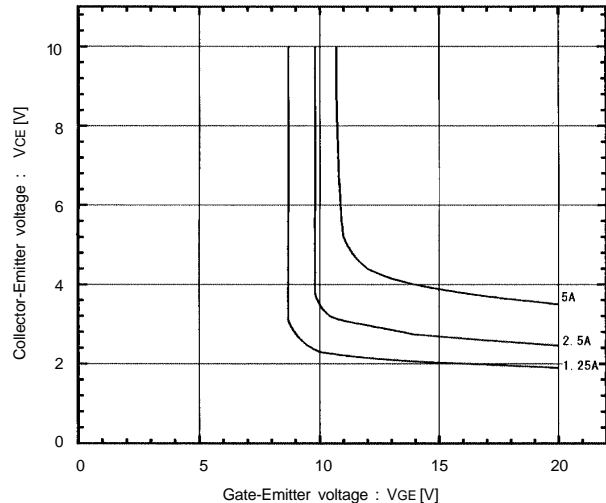

Switching time vs. Collector current
V_{CC}=600V, R_G=430 ohm, V_{GE}=±15V, T_j=25°C






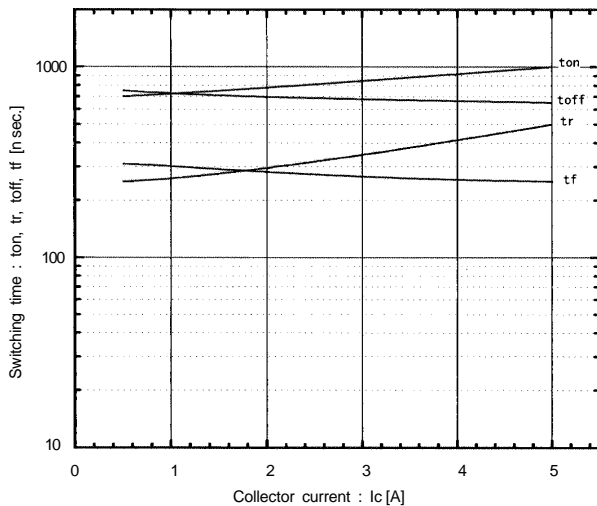


Switching time vs. Collector current
V_{CC}=600V, R_G=430 ohm, V_{GE}=±15V, T_j=125°C

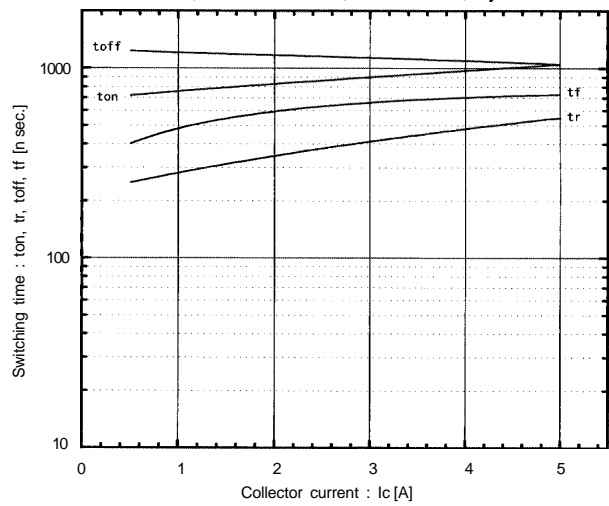

Characteristics


1MBC03-120, 1MB03D-120

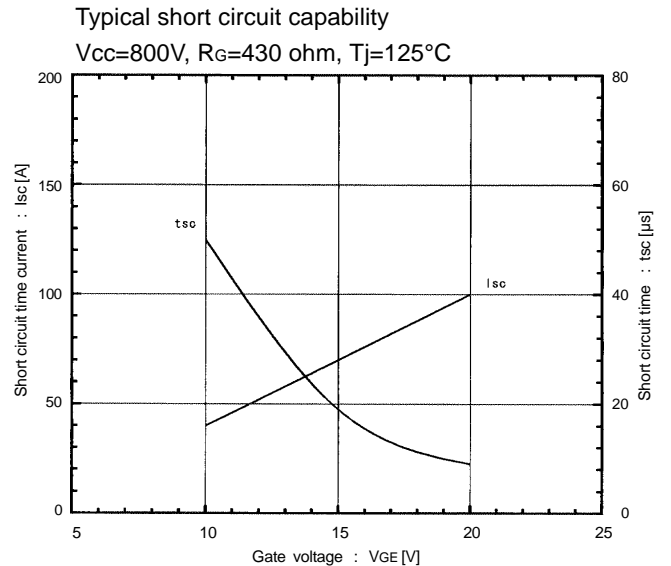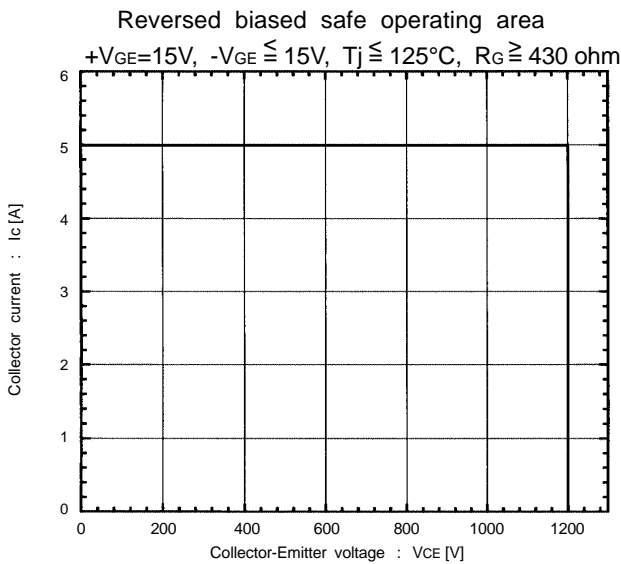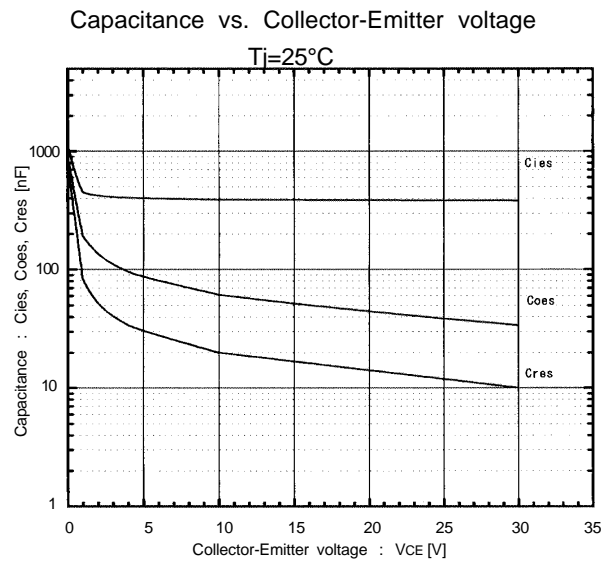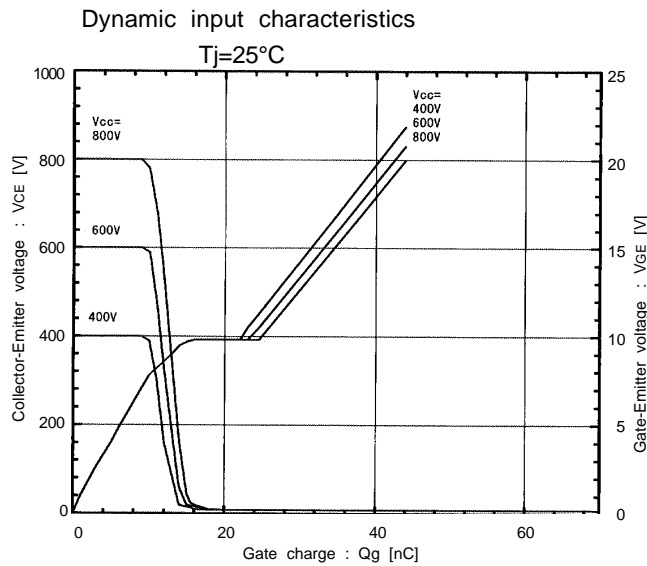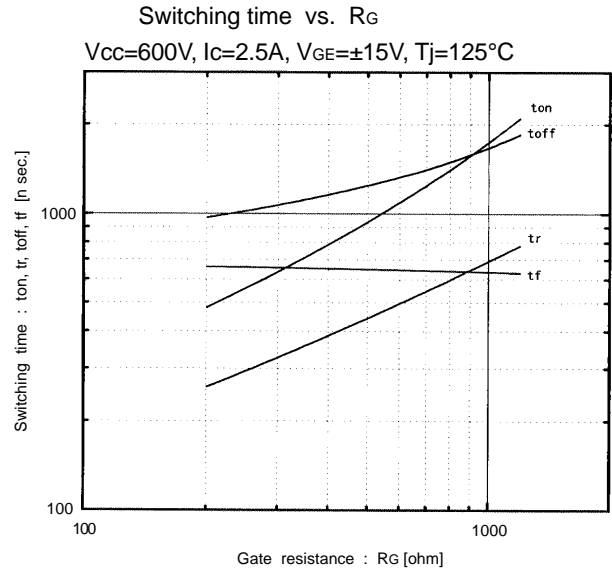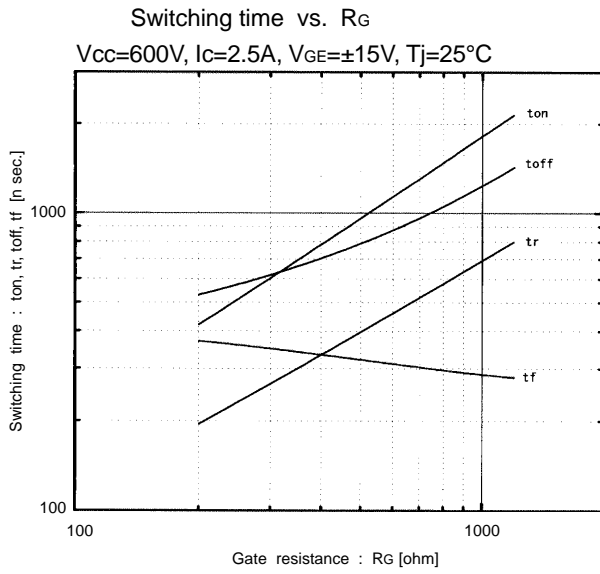

■ Characteristics

1MBC03-120,1MB03D-120


Transient thermal resistance

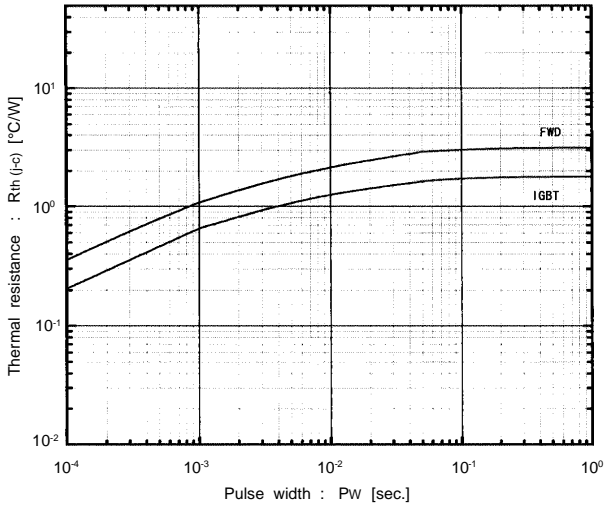

1MB03D-120


Reverse recovery time vs. Forward current

$-di/dt=7.5A/\mu sec$

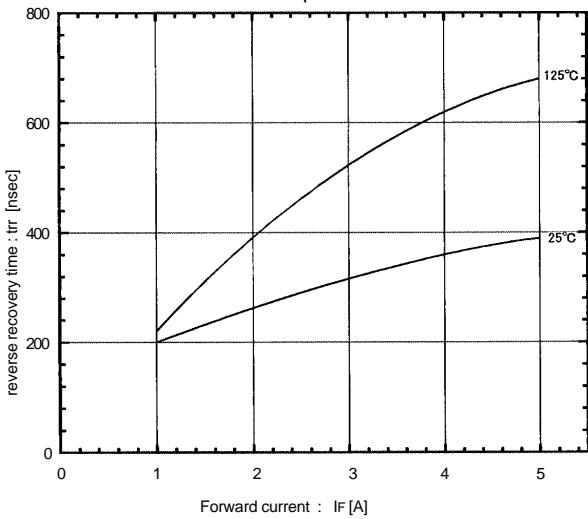


Reverse recovery current vs. Forward current

$-di/dt=7.5A/\mu sec$

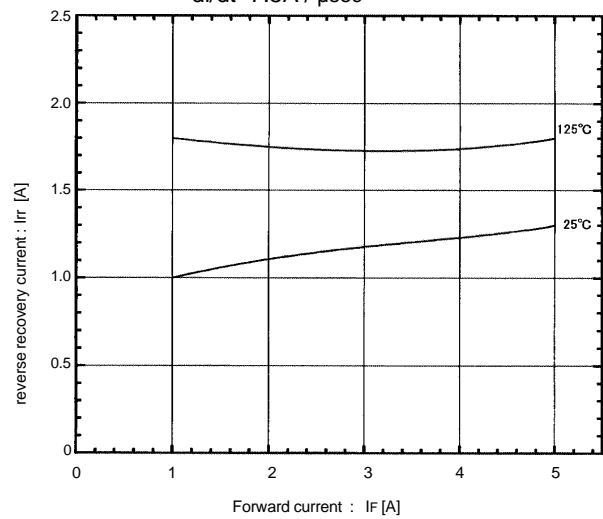

Forward current vs. Forward voltage

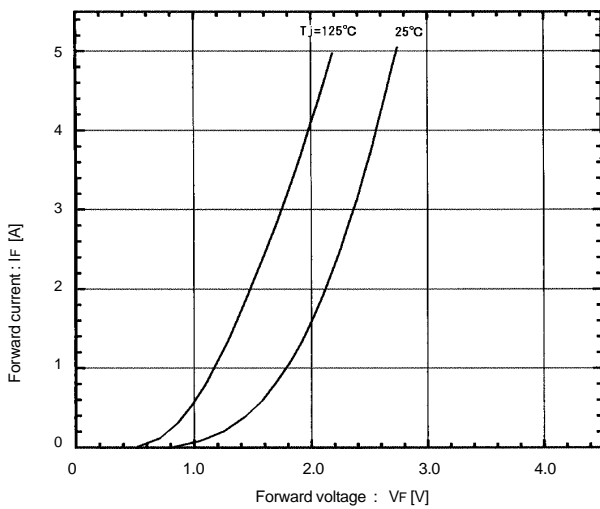

Reverse recovery time characteristics vs. $-di/dt$

$I_F=2.5A, T_j=125^{\circ}C$

