

# 2SK2876-01MR

FUJI POWER MOSFET

## N-CHANNEL SILICON POWER MOSFET

### FAP-2S Series

#### Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

#### Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

#### Maximum ratings and characteristic Absolute maximum ratings

(Tc=25°C unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V <sub>DS</sub>	500	V
Continuous drain current	I <sub>D</sub>	±6	A
Pulsed drain current	I <sub>D(puls)</sub>	±24	A
Gate-source voltage	V <sub>GS</sub>	±35	V
Repetitive or non-repetitive	IAR*2	6	A
Maximum Avalanche Energy	EAS*1	196.9	mJ
Max. power dissipation	P <sub>D</sub>	30	W
Operating and storage temperature range	T <sub>ch</sub> T <sub>stg</sub>	+150 -55 to +150	°C °C

\*1 L=10.0mH, V<sub>CC</sub>=50V \*2 T<sub>ch</sub>≥150°C


#### Electrical characteristics (Tc =25°C unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	V <sub>(BR)DSS</sub>	I <sub>D</sub> =1mA V <sub>GS</sub> =0V	500			V
Gate threshold voltage	V <sub>GS(th)</sub>	I <sub>D</sub> =1mA V <sub>DS</sub> =V <sub>GS</sub>	3.5	4.0	4.5	V
Zero gate voltage drain current	I <sub>DSS</sub>	V <sub>DS</sub> =500V V <sub>GS</sub> =0V		10	500	μA
		T <sub>ch</sub> =25°C				
		V <sub>GS</sub> =0V		0.2	1.0	mA
		T <sub>ch</sub> =125°C				
Gate-source leakage current	I <sub>GSS</sub>	V <sub>GS</sub> =±35V V <sub>DS</sub> =0V		10	100	nA
Drain-source on-state resistance	R <sub>DS(on)</sub>	I <sub>D</sub> =3A V <sub>GS</sub> =10V		1.25	1.5	Ω
Forward transconductance	g <sub>fs</sub>	I <sub>D</sub> =3A V <sub>DS</sub> =25V	2	4		S
Input capacitance	C <sub>iss</sub>	V <sub>DS</sub> =25V		540	810	pF
Output capacitance	C <sub>oss</sub>	V <sub>GS</sub> =0V		100	150	pF
Reverse transfer capacitance	C <sub>rss</sub>	f=1MHz		45	70	pF
Turn-on time t <sub>on</sub>	td(on)	V <sub>CC</sub> =300V I <sub>D</sub> =6A		13	20	ns
	t <sub>r</sub>	V <sub>GS</sub> =10V		30	45	ns
Turn-off time t <sub>off</sub>	td(off)	R <sub>GS</sub> =10Ω		40	60	ns
	t <sub>f</sub>			25	40	ns
Avalanche capability	I <sub>AV</sub>	L=10.0 mH T <sub>ch</sub> =25°C	6			A
Diode forward on-voltage	V <sub>SD</sub>	I <sub>F</sub> =2I <sub>D</sub> V <sub>GS</sub> =0V T <sub>ch</sub> =25°C		1.0	1.5	V
Reverse recovery time	t <sub>rr</sub>	I <sub>F</sub> =I <sub>D</sub> V <sub>GS</sub> =0V		450		ns
Reverse recovery charge	Q <sub>rr</sub>	-di/dt=100A/μs T <sub>ch</sub> =25°C		3.2		μC


#### Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	R <sub>th(ch-c)</sub>	channel to case			4.17	°C/W
	R <sub>th(ch-a)</sub>	channel to ambient			62.5	°C/W







#### Outline Drawings






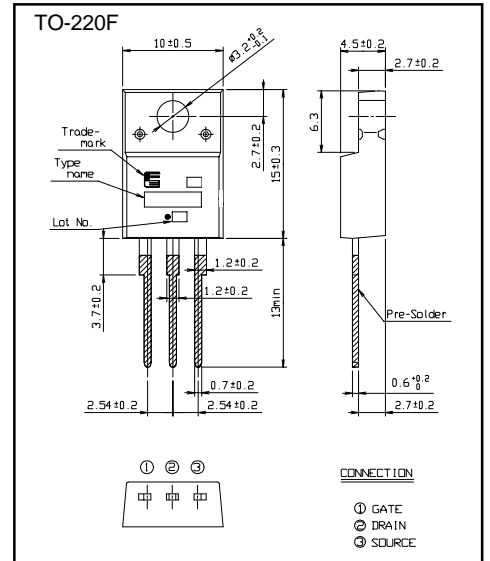



#### Equivalent circuit schematic

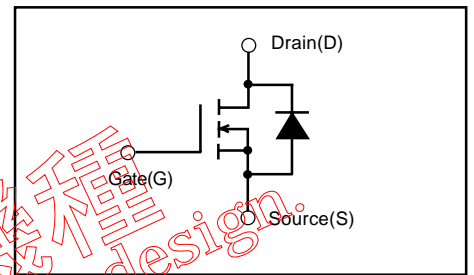

Characteristics

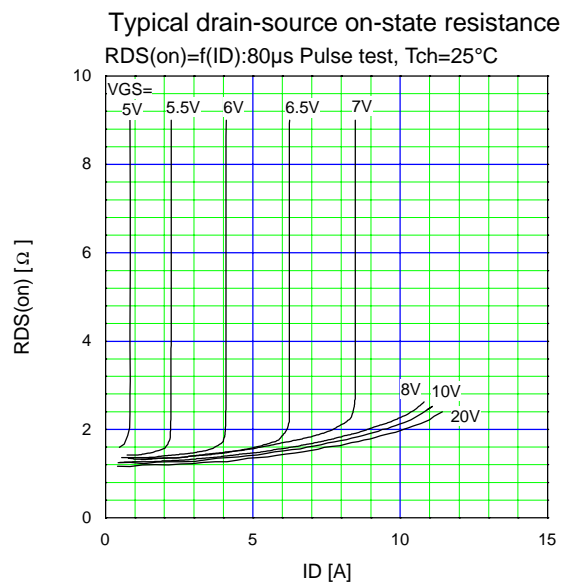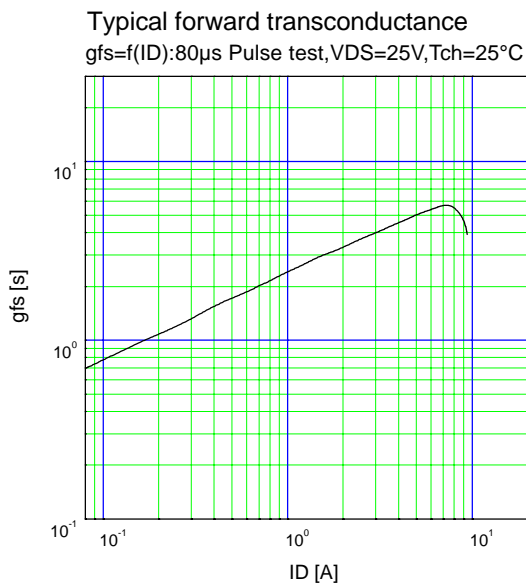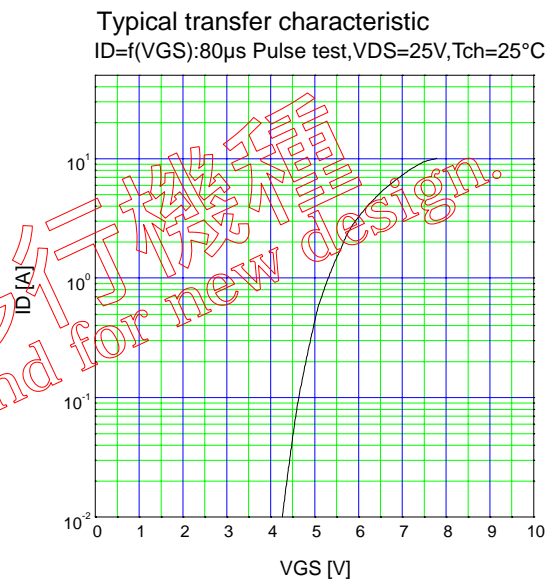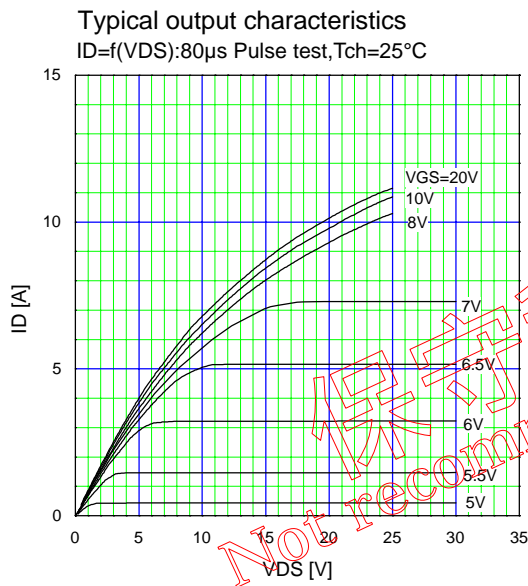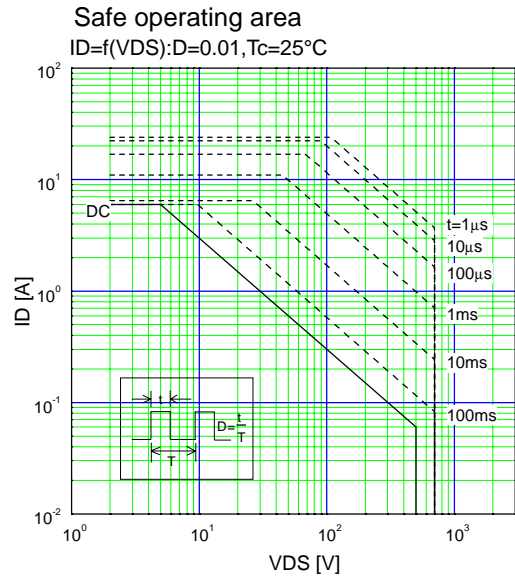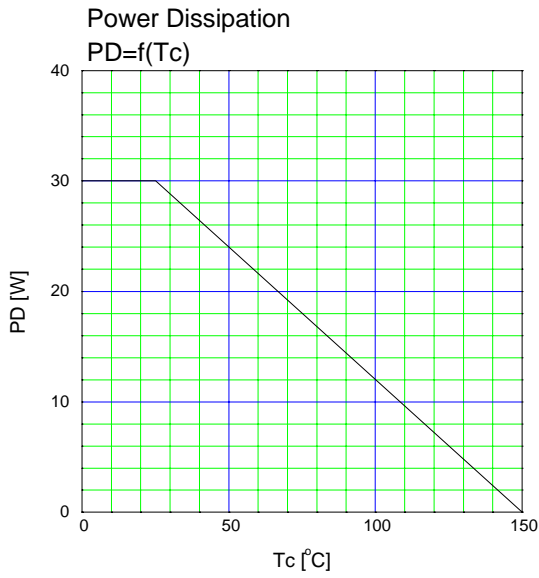

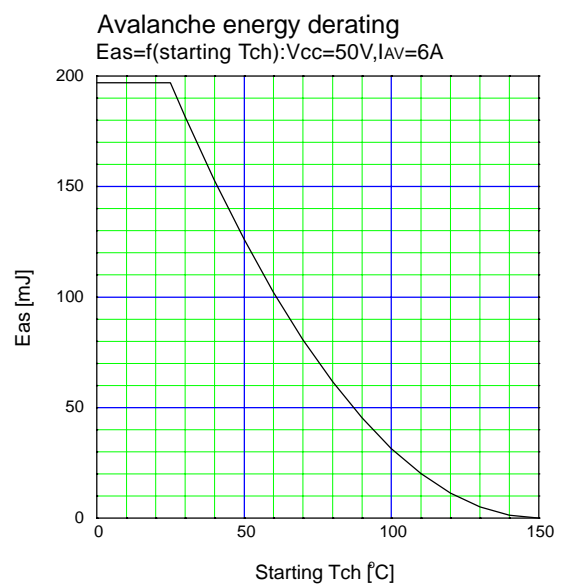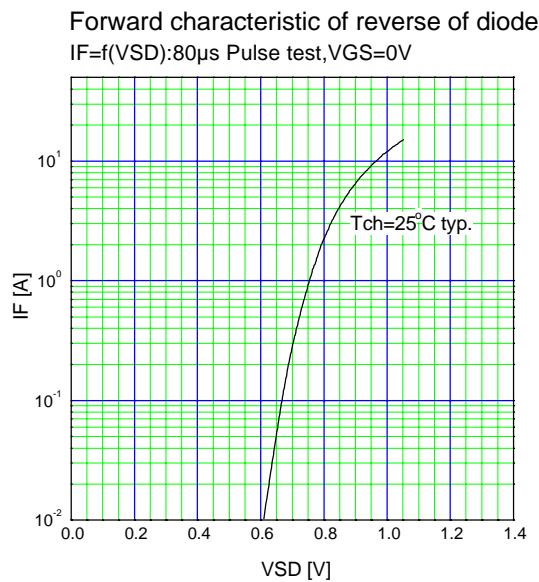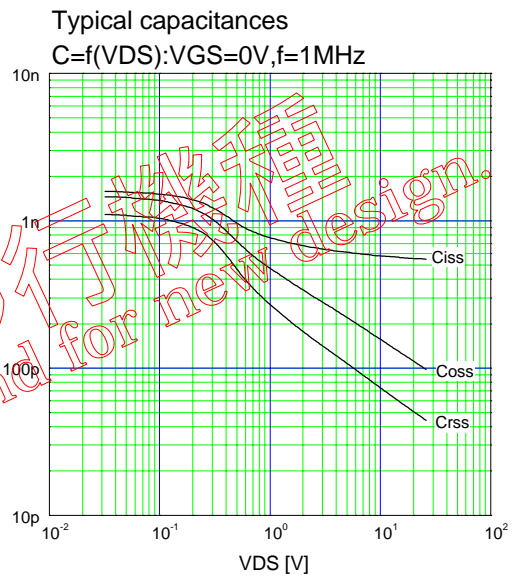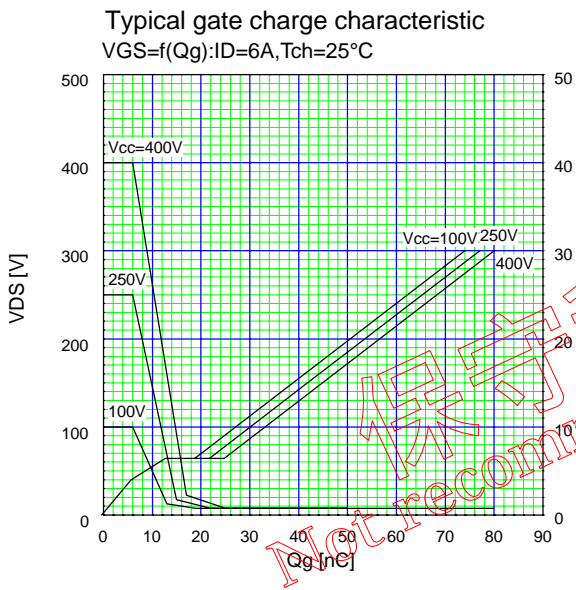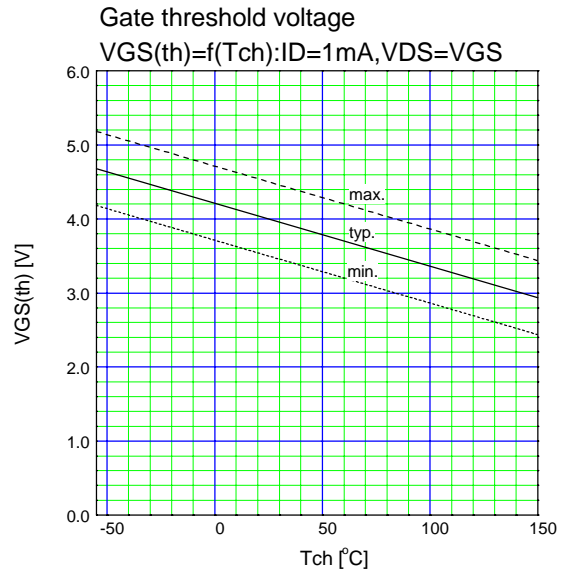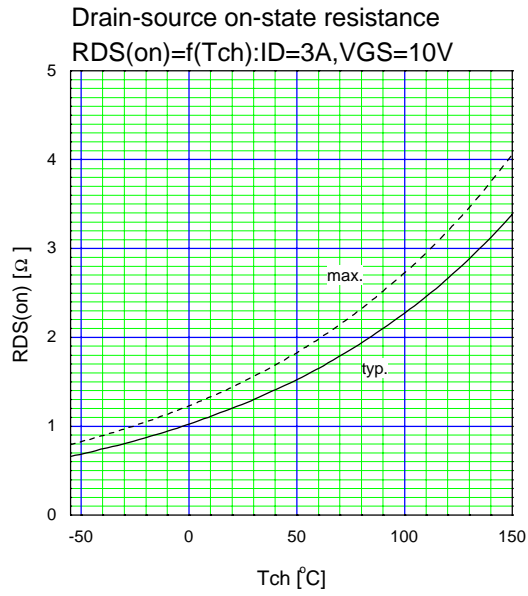

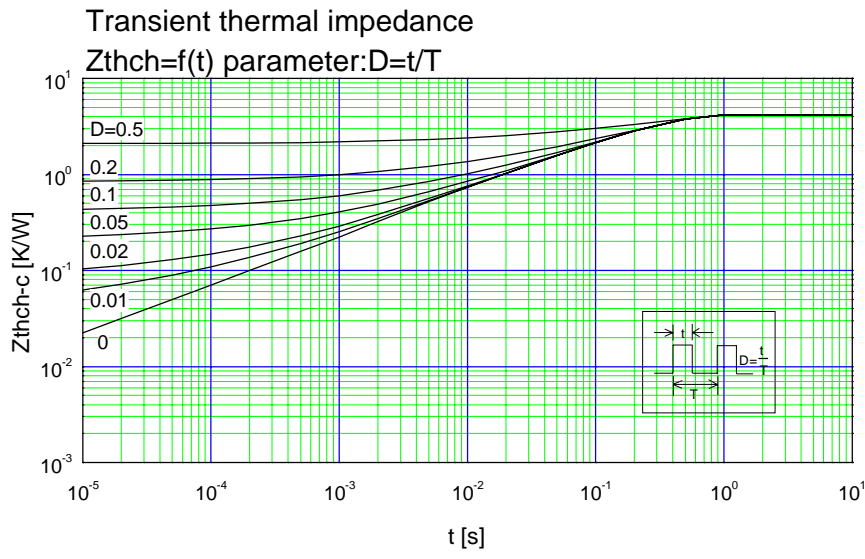

保守移行機種  
Not recommend for new design.