

Super FAP-G Series

Features

- High speed switching
- Low on-resistance
- No secondary breakdown
- Low driving power
- Avalanche-proof

Applications

- Switching regulators
- UPS (Uninterruptible Power Supply)
- DC-DC converters

Maximum ratings and characteristic Absolute maximum ratings

($T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Ratings	Unit
Drain-source voltage	V_{DS}	500	V
	$V_{DSX} *5$	500	V
Continuous drain current	I_D	± 25	A
Pulsed drain current	$I_{D(puls)}$	± 100	A
Gate-source voltage	V_{GS}	± 30	V
Repetitive or non-repetitive	$I_{AR} *2$	25	A
Maximum Avalanche Energy	$E_{AS} *1$	336.5	mJ
Maximum Drain-Source dV/dt	$dV_{DS}/dt *4$	20	kV/ μs
Peak Diode Recovery dV/dt	$dV/dt *3$	5	kV/ μs
Max. power dissipation	P_D	$T_a=25^\circ\text{C}$	2.50
		$T_c=25^\circ\text{C}$	335
Operating and storage temperature range	T_{ch}	+150	$^\circ\text{C}$
	T_{stg}	-55 to +150	$^\circ\text{C}$

*1 $L=987\mu\text{H}$, $V_{CC}=50\text{V}$, See to Avalanche Energy Graph *2 $T_{ch}\leq 150^\circ\text{C}$

*3 $I_F\leq -I_D$, $-di/dt=50\text{A}/\mu\text{s}$, $V_{CC}\leq BV_{DSS}$, $T_{ch}\leq 150^\circ\text{C}$ *4 $V_{DS}\leq 500\text{V}$ *5 $V_{GS}=-30\text{V}$


Electrical characteristics ($T_c=25^\circ\text{C}$ unless otherwise specified)

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain-source breakdown voltage	$V_{(BR)DSS}$	$I_D=250\mu\text{A}$ $V_{GS}=0\text{V}$	500			V
Gate threshold voltage	$V_{GS(th)}$	$I_D=250\mu\text{A}$ $V_{DS}=V_{GS}$	3.0		5.0	V
Zero gate voltage drain current	I_{DSS}	$V_{DS}=500\text{V}$ $V_{GS}=0\text{V}$			25	μA
		$V_{DS}=400\text{V}$ $V_{GS}=0\text{V}$			250	μA
Gate-source leakage current	I_{GSS}	$V_{GS}=\pm 30\text{V}$ $V_{DS}=0\text{V}$		10	100	nA
Drain-source on-state resistance	$R_{DS(on)}$	$I_D=10.5\text{A}$ $V_{GS}=10\text{V}$		0.20	0.26	Ω
Forward transconductance	g_{fs}	$I_D=10.5\text{A}$ $V_{DS}=25\text{V}$	11	22		S
Input capacitance	C_{iss}	$V_{DS}=25\text{V}$		2280	3420	pF
Output capacitance	C_{oss}	$V_{GS}=0\text{V}$		320	480	pF
Reverse transfer capacitance	C_{rss}	$f=1\text{MHz}$		16	24	pF
Turn-on time t_{on}	$t_{d(on)}$	$V_{CC}=300\text{V}$ $I_D=10.5\text{A}$		27	41	ns
	t_r	$V_{GS}=10\text{V}$		37	56	ns
Turn-off time t_{off}	$t_{d(off)}$	$R_{GS}=10\Omega$		75	113	ns
	t_f			11	17	ns
Total Gate Charge	Q_G	$V_{CC}=300\text{V}$		54	81	nC
Gate-Source Charge	Q_{GS}	$I_D=21\text{A}$		16	24	nC
Gate-Drain Charge	Q_{GD}	$V_{GS}=10\text{V}$		20	30	nC
Avalanche capability	I_{AV}	$L=987\mu\text{H}$ $T_{ch}=25^\circ\text{C}$	25			A
Diode forward on-voltage	V_{SD}	$I_F=21\text{A}$ $V_{GS}=0\text{V}$ $T_{ch}=25^\circ\text{C}$		0.98	1.50	V
Reverse recovery time	t_{rr}	$I_F=21\text{A}$ $V_{GS}=0\text{V}$		0.7		μs
Reverse recovery charge	Q_{rr}	$-di/dt=100\text{A}/\mu\text{s}$ $T_{ch}=25^\circ\text{C}$		10.0		μC


Thermal characteristics

Item	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Thermal resistance	$R_{th(ch-c)}$	channel to case			0.373	$^\circ\text{C}/\text{W}$
	$R_{th(ch-a)}$	channel to ambient			50.0	$^\circ\text{C}/\text{W}$

Outline Drawings [mm]

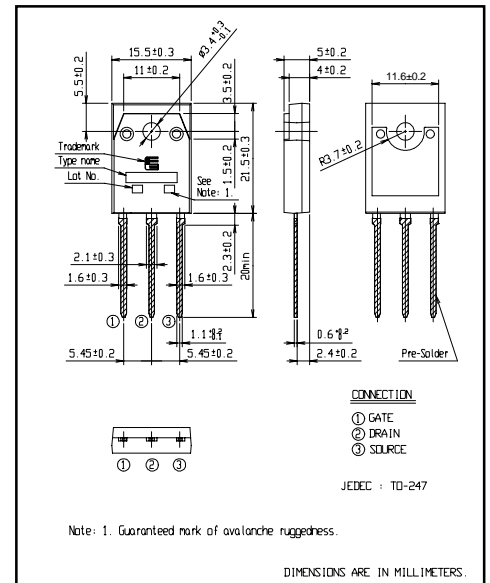

Equivalent circuit schematic

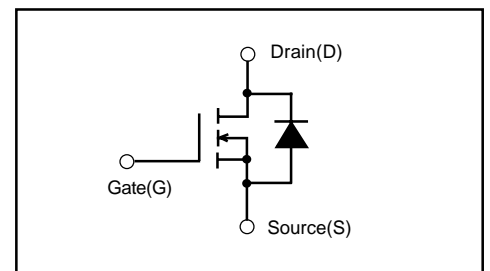

■ Characteristics

