

600V / 15A


Molded Package

■ Features

- Small molded package
- Low power loss
- Soft switching with low switching surge and noise
- High reliability, high ruggedness (RBSOA, SCSOA etc.)
- Comprehensive line-up

■ Applications

- Inverter for Motor drive
- AC and DC Servo drive amplifier
- Uninterruptible power supply

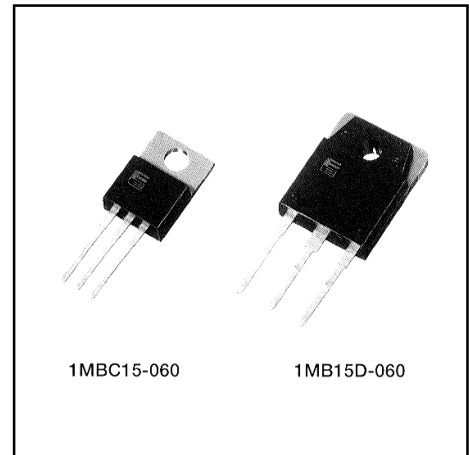

■ Maximum ratings and characteristics

- Absolute maximum ratings (at $T_c=25^\circ\text{C}$ unless otherwise specified)



1MBC15-060 / IGBT

Item	Symbol	Rating	Unit		
Collector-Emitter voltage	V_{CES}	600	V		
Gate-Emitter voltage	V_{GES}	± 20	V		
Collector current	DC	$T_c=25^\circ\text{C}$	I_{C25}	24	A
		$T_c=80^\circ\text{C}$	I_{C80}	15	A
	1ms	$T_c=25^\circ\text{C}$	I_{CP}	96	A
Max. power dissipation(IGBT)	P_C	90	W		
Operating temperature	T_j	+150	$^\circ\text{C}$		
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$		
Screw torque	-	40	N·m		

1MB15D-060 / IGBT+FWD

Item	Symbol	Rating	Unit		
Collector-Emitter voltage	V_{CES}	600	V		
Gate-Emitter voltage	V_{GES}	± 20	V		
Collector current	DC	$T_c=25^\circ\text{C}$	I_{C25}	33	A
		$T_c=100^\circ\text{C}$	I_{C100}	15	A
	1ms	$T_c=25^\circ\text{C}$	I_{CP}	132	A
Max. power dissipation (IGBT)	P_C	120	W		
Max. power dissipation (FWD)	P_C	60	W		
Operating temperature	T_j	+150	$^\circ\text{C}$		
Storage temperature	T_{stg}	-40 to +150	$^\circ\text{C}$		
Screw torque	-	50	N·m		

■ Equivalent Circuit Schematic



● Electrical characteristics (at Tj=25°C unless otherwise specified)

1MBC15-060 / IGBT

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	ICES	–	–	1.0	VGE=0V, VCE=600V	mA
Gate-Emitter leakage current	IGES	–	–	20	VCE=0V, VGE=±20V	µA
Gate-Emitter threshold voltage	VGE(th)	5.5	–	8.5	VCE=20V, IC=15mA	V
Collector-Emitter saturation voltage	VCE(sat)	–	–	3.0	VGE=15V, IC=15A	V
Input capacitance	Cies	–	1000	–	VGE=0V	pF
Output capacitance	Coes	–	200	–	VCE=10V	
Reverse transfer capacitance	Cres	–	40	–	f=1MHz	
Turn-on time	ton	–	–	1.2	VCC=300V IC=15A	µs
	tr	–	–	0.6	VGE=±15V	
Turn-off time	toff	–	–	1.0	RG=160 ohm	µs
	tf	–	–	0.35	(Half Bridge)	

1MB15D-060 / IGBT+FWD

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Zero gate voltage collector current	ICES	–	–	1.0	VGE=0V, VCE=600V	mA
Gate-Emitter leakage current	IGES	–	–	20	VCE=0V, VGE=±20V	µA
Gate-Emitter threshold voltage	VGE(th)	5.5	–	8.5	VCE=20V, IC=15mA	V
Collector-Emitter saturation voltage	VCE(sat)	–	–	3.0	VGE=15V, IC=15A	V
Input capacitance	Cies	–	1000	–	VGE=0V	pF
Output capacitance	Coes	–	200	–	VCE=10V	
Reverse transfer capacitance	Cres	–	40	–	f=1MHz	
Turn-on time	ton	–	–	1.2	VCC=300V, IC=15A	µs
	tr	–	–	0.6	VGE=±15V	
Turn-off time	toff	–	–	1.0	RG=160 ohm	µs
	tf	–	–	0.35	(Half Bridge)	
FWD forward on voltage	VF	–	–	3.0	IF=15A, VGE=0V	V
Reverse recovery time	trr	–	–	0.3	IF=15A, VGE=-10V, di/dt=100A/µs	µs

● Thermal resistance characteristics

1MBC15-060 / IGBT

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	Rth(j-c)	–	–	1.38	IGBT	°C/W


1MB15D-060 / IGBT+FWD

Item	Symbol	Characteristics			Conditions	Unit
		Min.	Typ.	Max.		
Thermal resistance	Rth(j-c)	–	–	1.04	IGBT	°C/W
	Rth(j-c)	–	–	2.08	FWD	°C/W

■ Outline drawings, mm


1MBC15-060

TO-220AB

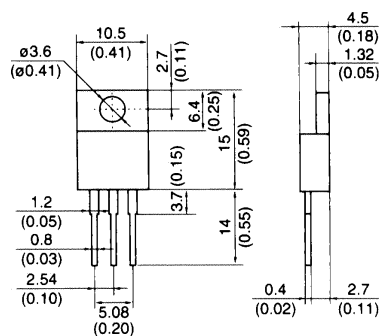

1MB15D-060

TO-3P

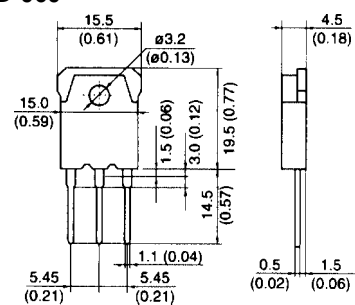


Characteristics

1MBC15-060,1MB15D-060


Collector current vs. Collector-Emittor voltage

T_j=25°C

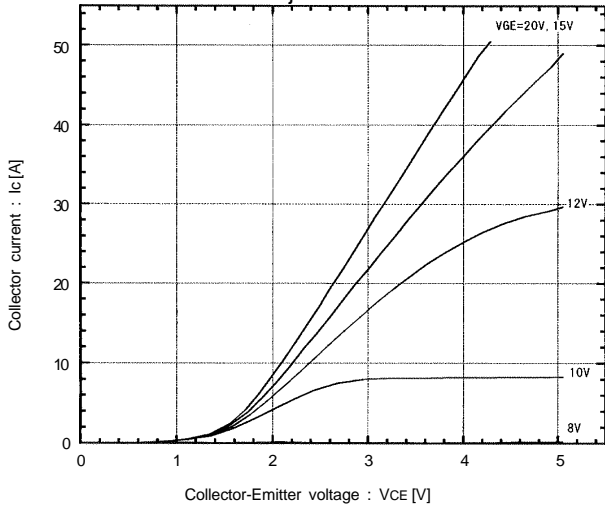


Collector current vs. Collector-Emittor voltage

T_j=125°C

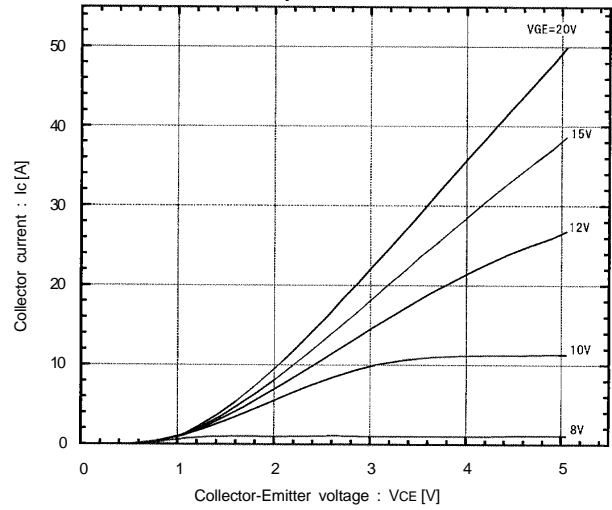


Collector-Emittor vs. Gate-Emittor voltage

T_j=25°C

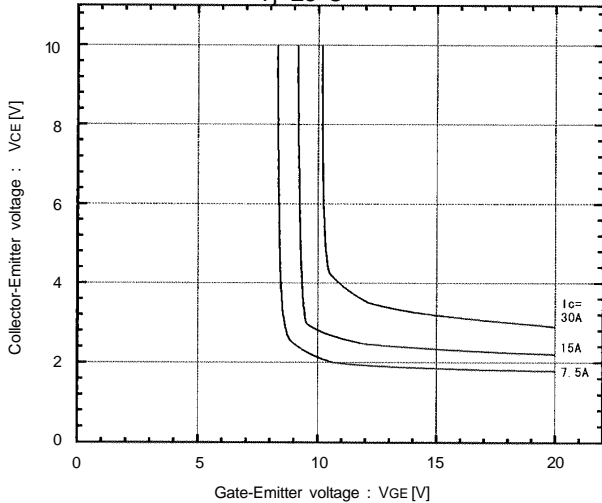


Collector-Emittor vs. Gate-Emittor voltage

T_j=125°C

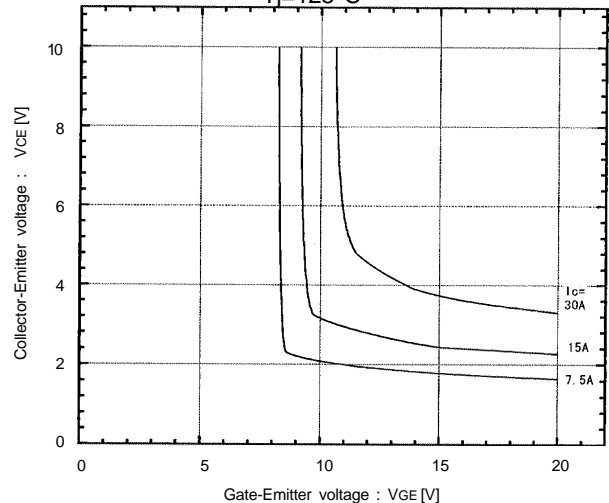


Switching time vs. Collector current

V_{CC}=300V, R_G=160 ohm, V_{GE}=±15V, T_j=25°C

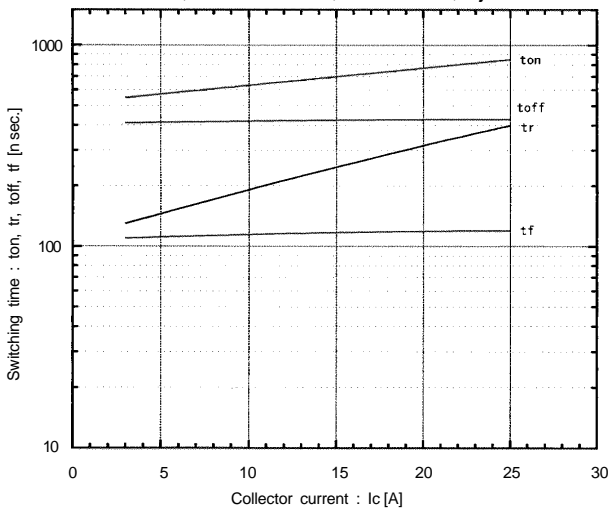







Switching time vs. Collector current

V_{CC}=300V, R_G=160 ohm, V_{GE}=±15V, T_j=125°C

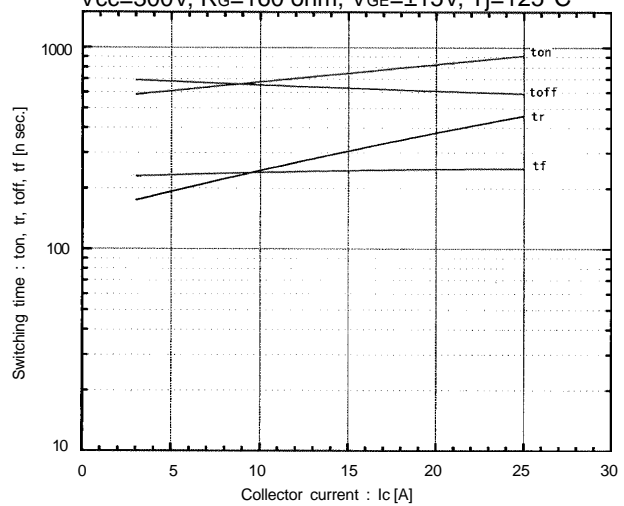

Characteristics


1MBC15-060, 1MB15D-060

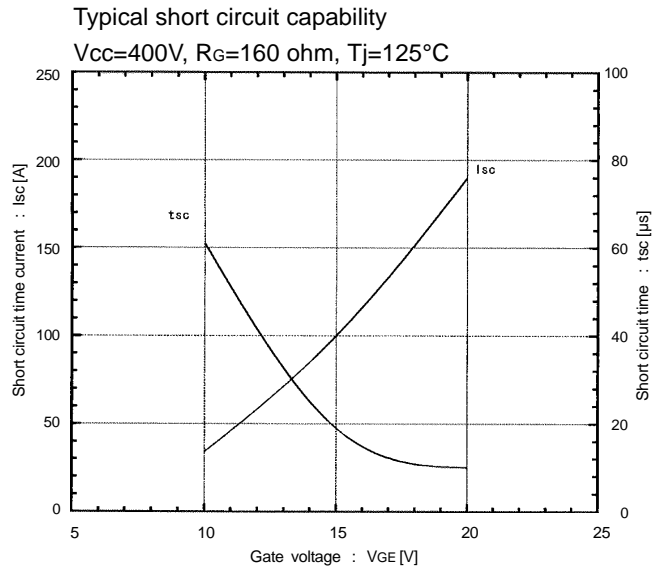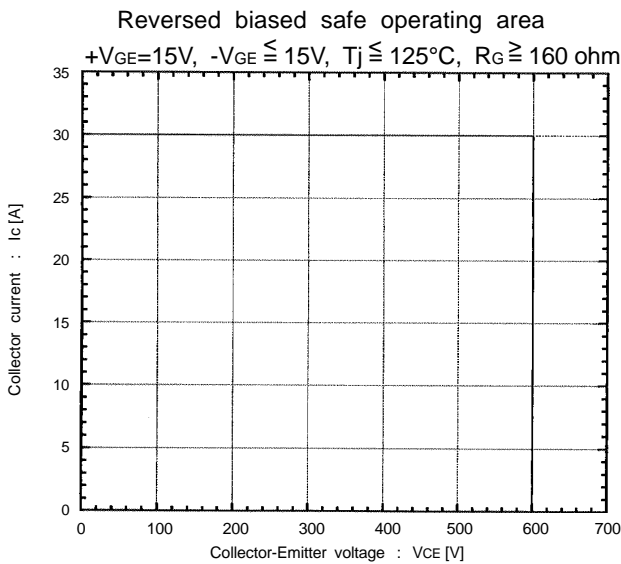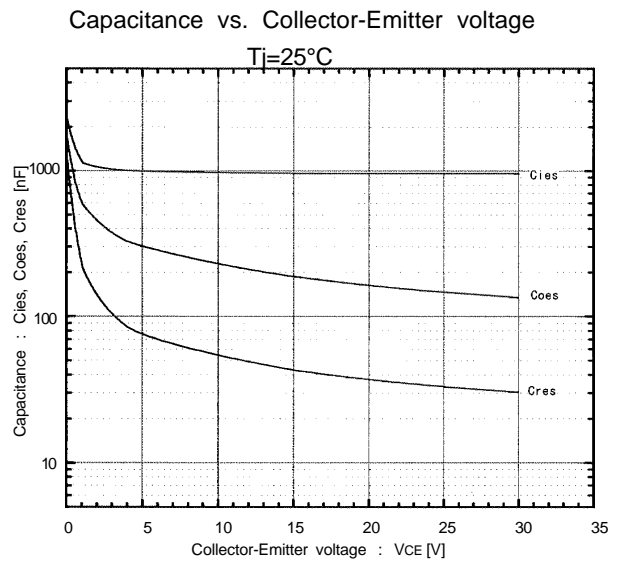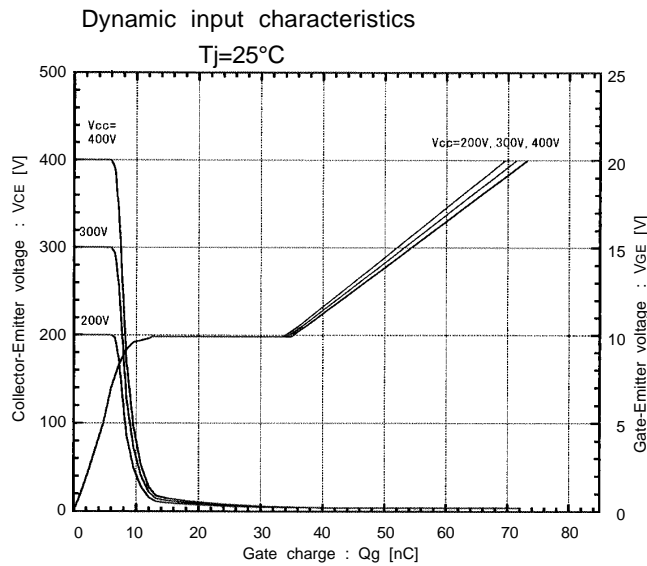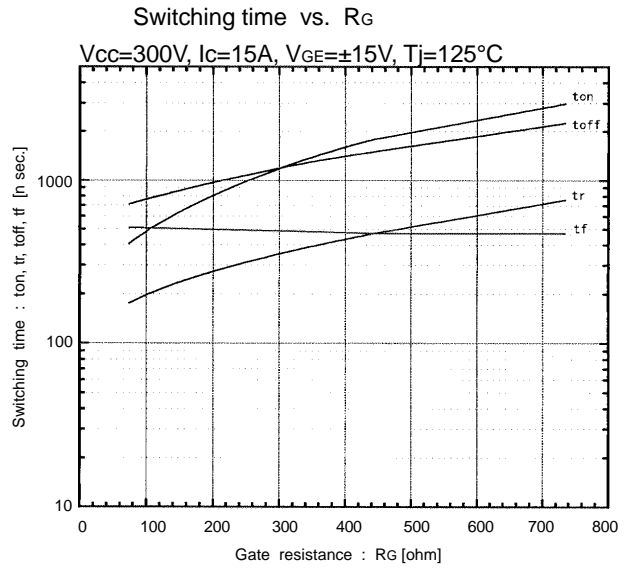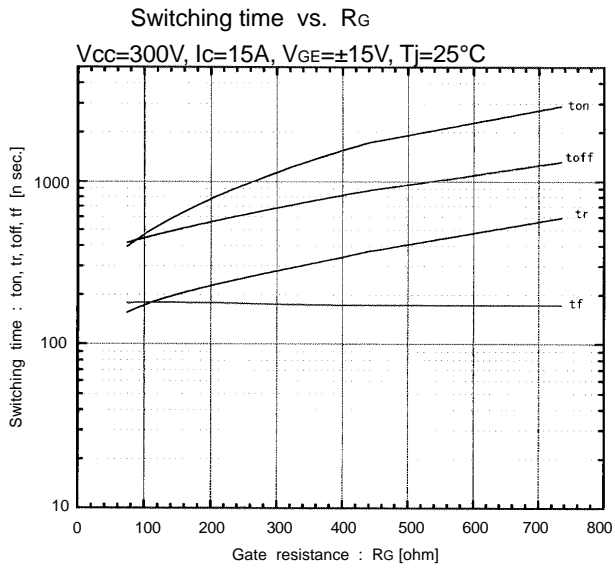

■ Characteristics

1MBC15-060,1MB15D-060


Transient thermal resistance

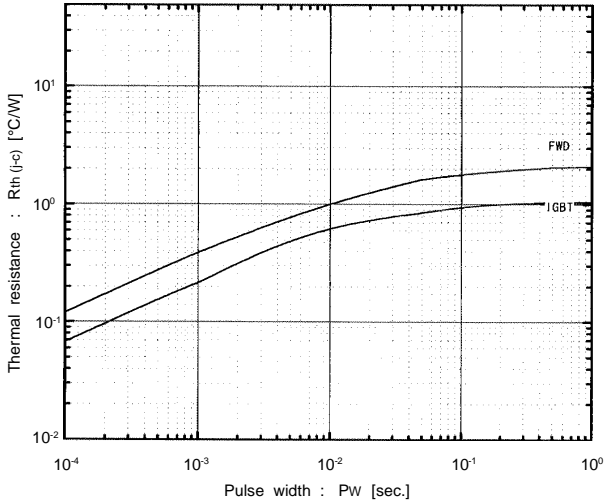

1MB15D-060


Reverse recovery time vs. Forward current

-di/dt=45A / μsec

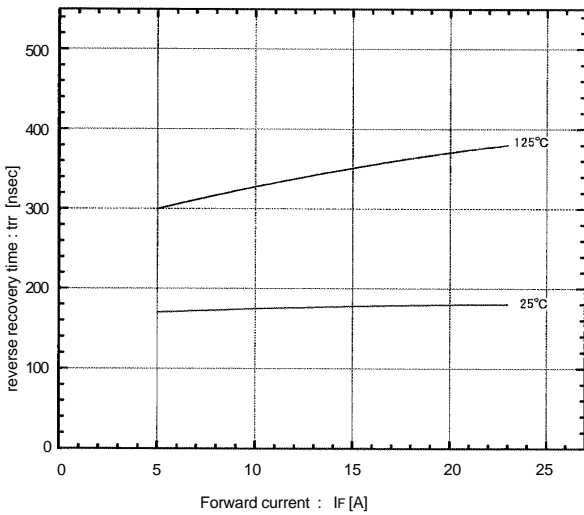


Reverse recovery current vs. Forward current

-di/dt=45A / μsec

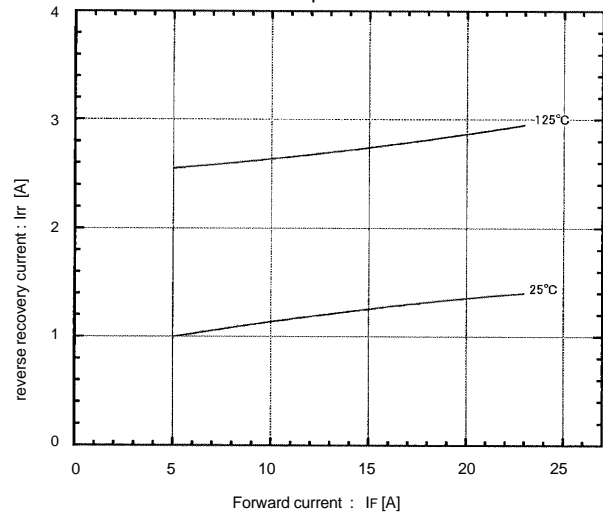

Forward current vs. Forward voltage

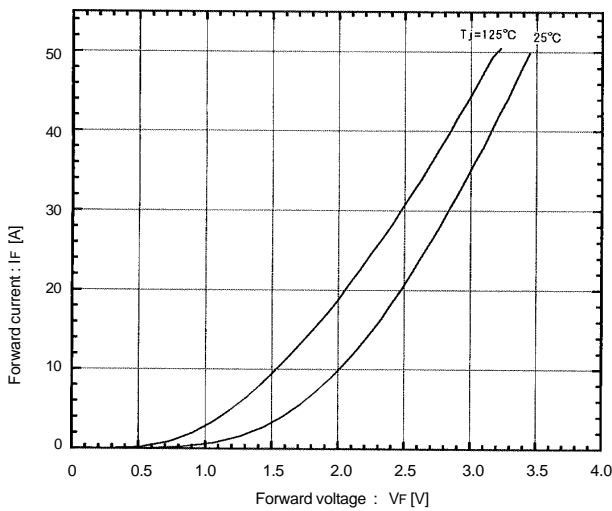

Reverse recovery time characteristics vs. -di/dt

IF=15A, Tj=125°C

